

大流量滤芯

Large flow filter

大流量滤芯产品应用范围

Large flow filter product application

饮用纯净水、制药无菌用水、设备用水、油田注井用水、工业用水、高温用水、饮料果汁酒类、油料油脂、酸碱腐蚀性液体、油漆涂料、化学有机溶剂、浆液药液、胶水、墨水、显像用药液等液态介质的前置及终端过滤。

Pure drinking water, water, water, sterile pharmaceutical equipment of injection wells water, industrial water, water temperature, oil, wine, fruit juice beverage alkali corrosive liquid, paint, chemical organic solvent, slurry liquid, glue, ink, medicine imaging liquid liquid medium front and terminal filter.

大流量水滤芯性能特点

Large flow water filter performance characteristics

●大流量意味着使用更少数量的滤芯，降低劳动力和运行成本；

Large flow filter means using less, reduce labor and operating costs;

●高流量意味着使用更小尺寸的过滤器壳体，降低投资成本,节省占地面积；

High flow means using filter housing with smaller size,

lower investment costs, save the area;

●滤芯的更换更加快速，简便和安全；

Replace the filter – more quick, convenient and safe;

●O型圈确保过滤器的可靠；

The O ring filter to ensure reliable;

●热熔粘接的聚丙烯材质可以防止颗粒释放和卸载，这不同于普通的线绕滤芯；

Polypropylene – adhesive can prevent particle release and unloading, which is different from the ordinary wirewound filter;

●折叠式表面设计使得高流量滤芯的压力降比其他滤芯更低、使用寿命更长；

The folding surface design makes high flow filter pressure drop than the other filter lower and longer service life;

●允许高流量的介质通过滤材,具有高效、低压损和长寿命等优点；

It allows high flow through the filter medium, has the advantages of high efficiency, low loss and long life etc.;

●滤芯的里进外出结构使得滤芯更换容易,同时保持污染物拦截在滤芯的内部；

The filter in out structure allows easy replacement of the filter core, while maintaining the interception of pollutants in the filter inside;

●滤芯的无金属结构使得它可以进行完全燃烧、压扁等环保处理；

Metal structure – filter makes it possible for complete combustion, squash and other environmental treatment;

●滤芯的β值达3000；

The beta value of 3000 – element;

●滤壳中可装多支滤芯,可以使用很广的流量范围,无论是启动还是连续运行时都可使用；

A filter can be installed – filter shell, can use a wide range of flow, either start or continuous operation can be used;

Dynamic or continuous operation can be used;

●滤芯经久耐用,还可以最少地、最经济地配置过滤器。

The filter can also be durable, at least, the most economical filter configuration.





汇泉净化器材
Huiquan purification equipment

公司简介 Company Profile

/品/质/卓/越/
Excellant quality

服/务/专/业/
Professional services



山东省郓城县汇泉净化器材有限公司位于宋江故里——郓城，东临孔孟之乡，西接孙膑故里，街黄河、望梁山水泊，依东平之湖，风景优美。日东高速和济广高速纵横交汇，京九铁路贯穿全境，交通便利。

Shandong Yuncheng Huiquan material limited company purifier in the hometown of Song Jiang - Yuncheng, east of the town of Confucius, west of the Yellow River, Wang Bin hometown, with beam according to Dongping lake park landscape, beautiful scenery. Nitto high-speed high-speed wide intersection of vertical and horizontal, the Beijing Kowloon railway runs through the whole territory, convenient transportation.

我公司拥有最先进的熔喷滤芯生产线，生产、销售PP熔喷滤芯，线绕滤芯，活性炭滤芯，韩式快接滤芯，折叠滤芯，大流量滤芯等水处理设备滤材，也可根据客户的要求标准进行加工定做。产品主要应用于液体过滤、空气净化、电子、油田、彩扩、化工、医药、食品、环保等行业。

We have the most advanced meltblown filter production line, production and sales of PP meltblown filter, wound filter, activated carbon filter, Korean filter, folded filter, large flow filter water treatment equipment such as filter material, also can be customized according to customer requirements and processing. The products are mainly used in liquid filtration, air purification, electronics, oil, chemical, pharmaceutical, food, printing, environmental protection and other industries.

我公司拥有多年的生产经验以及各种先进完备的生产工艺、设备和检测设施，使得我们可以以高质量的产品，低廉的价格和快捷的交货服务于客户。产品远销欧美、澳洲、东南亚、中东、日韩等地区和国家。产品价格合理，交货及时。产品规格完全符合国际标准，质量符合或高于国内外同类产品标准。

Our company has many years of production experience and a variety of advanced production technology, equipment and testing facilities, so that we can be of high quality products, low prices and fast delivery service to customers. Products are exported to Europe and the United States, Australia, Southeast Asia, the Middle East, Japan and South Korea and other regions and countries. Reasonable price, prompt delivery. Product specifications are fully in line with international standards, quality meets or exceeds the standards of similar products at home and abroad.

本公司以“诚信服务客户”为宗旨，秉承“用心来做事，以质量求生存，以信益谋发展”为经营理念，践行“开拓、创新、务实、奋进”的企业精神，坚持“科技主导市场，营销推动市场”的发展战略，树立行业内的专家形象。水是生命之源，健康是生命之本，共建健康生命家园，同创美好生活前程。

The company with "sincere customer service" for the purpose of adhering to the "hard work, to the quality of survival, and development benefits to the letter" business philosophy, the practice of "pioneering and innovative, pragmatic and progressive" spirit of enterprise, adhere to the "science and technology dominate the market, marketing to promote the development of strategic market", set up expert image within the industry. Water is the Source of Life health, this is life, build a healthy life home, create a better life.

山东菏泽汇泉净化器材有限公司

Heze in shandong huiquan purification equipment co., LTD

汇泉滤材
Huiquan filter

过滤器材专家
material filter equipment specialist

诚信为本 敬业创新 HUIQUAN
The good faith for this Professional innovation



微孔折叠滤芯

Microporous folded filter element

聚丙烯折叠滤芯

Polypropylene folding filter element

主要特点main features

聚丙烯折叠滤芯Polypropylene folding filter element

1.它是一种固定型深层过滤芯，过滤精度范围可从0.1微米到.60微米，可选择度非常大。

1. is a kind of fixed deep filter, the filter can range from 0.1 microns to.60 microns, very large selectivity.

2.其特有的低压差，大通量，高纳污量，较低的经济费用和广泛的化学相容性，深受用户欢迎。

2.unique low dropout, high flux, high capacity, low cost and wide chemical compatibility, welcomed by users.

3.采用热熔焊工艺，牢固且无释放物，保证了最低的溶出物和确保无纤维脱落。

3 using the heat of welding technology, firmly and without the release of material, ensure the dissolution and ensure no fiber loss lowest.

4.使用后可用普通方法清洗或用高压消毒柜及蒸气灭菌。

4. after use, can be cleaned with ordinary methods or with high pressure sterilizer and steam sterilization.

应用

application

主要用于：酒类，饮料，纯净水，有机溶剂，医药，生物和血浆产品，压缩空气过滤等。

Mainly used in: alcohol, beverages, purified water, organic solvents, pharmaceuticals, biological and plasma products, compressed air filtration, etc..



技术参数technical parameter

过滤精度：0.1、0.2、0.45、0.65、1、3、5、10、20、30、60 (μm)

Filtration accuracy: 0.1, 0.2, 0.45, 0.65, 1, 3, 5, 10, 20, 30, 60 (m)

密封材料：哇橡胶、丁晴橡胶、三元乙丙橡胶、氟橡胶

Sealing material: Wow rubber, nitrile rubber,

EPDM rubber, fluorine rubber three

密闭方式：热熔焊接

Airtight way: hot melt welding

有效过滤面积：0.4-0.7m²、10"

Effective filtration area: 10 square meters, 0.4-0.7"

滤芯直径：69.0mm

Filter straight through: 69.0mm

最高工作温度：80℃，0.28Mpa

Maximum operating temperature: 80 degrees C, 0.28Mpa

最大正压差：0.42Mpa(25℃)

Maximum positive pressure difference: 0.42Mpa (25 DEG C)


最大反压差：0.28Mpa(25℃)

Maximum back pressure difference: 0.28Mpa (25 DEG C)

灭菌条件：121℃ 30min

Sterilization conditions: 121 degrees C 30min

产品结构图

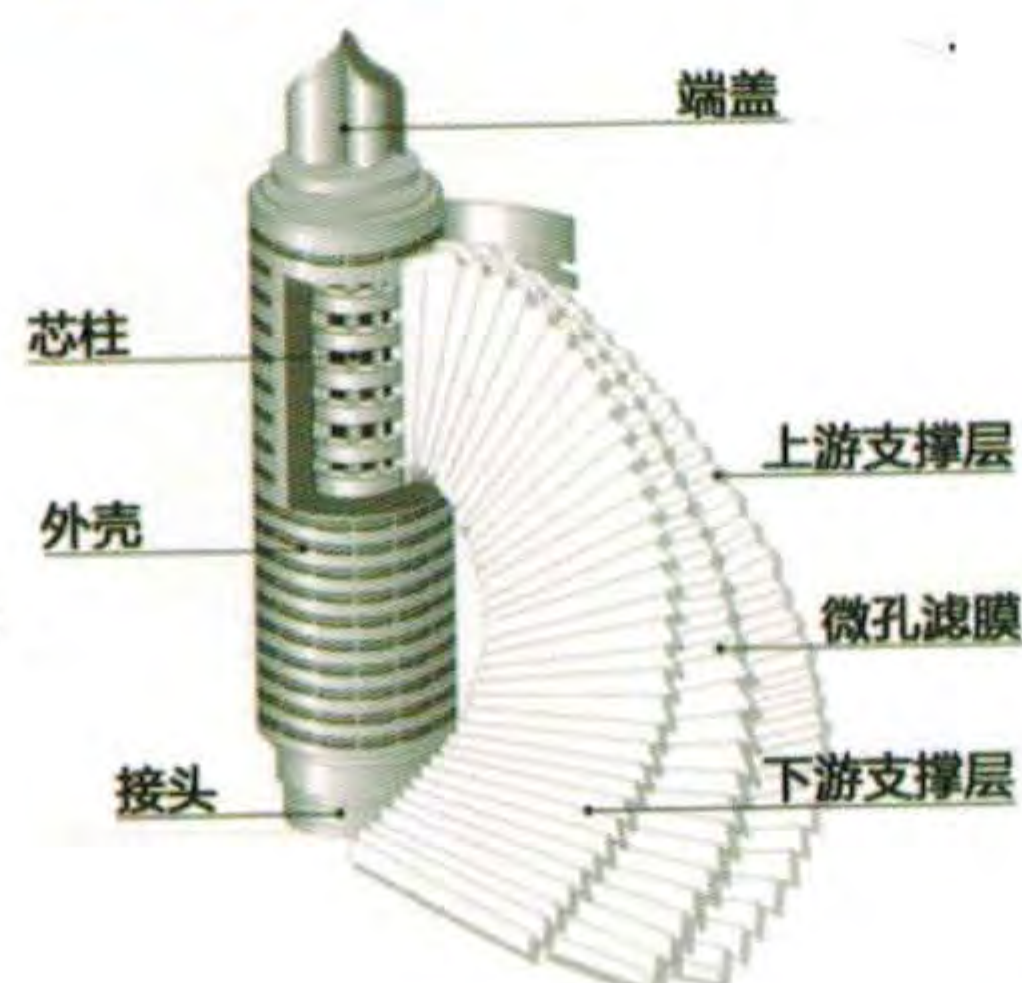

聚醚砜折叠滤芯

Polyether ether ketone folding filter element

主要特点

main features

聚醚砜折叠滤芯有良好的化学相容性和独特的亲水性，能提供高水平的过滤精度和流量。对蛋白质及贵重生物制剂的吸附率比尼龙膜和醋酸纤维膜低。已成为制药工业，及食品工业等行业用于终端液体过滤的首选。滤膜面积百分之八十以上的微孔开孔率，及独特的微孔几何形状，大大的提高了过滤效率。

100%产品经出厂前完整性测试，生物安全指标符合国家标准。The poly (ether sulfone) folding filter has good chemical compatibility and unique hydrophilicity, which can provide high level of filtration precision and flow.

The adsorption rate of protein and valuable biological agent was lower than that of nylon membrane and acetate fiber membrane. Has become the pharmaceutical industry, and the food industry and other industries for the final selection of liquid filtration. The pore opening ratio of the membrane area is more than eighty percent, and the unique shape of the micropore greatly improves the filtration efficiency.

100% product integrity test before delivery, bio safety indicators in line with national standards.

应用

application

主要适用于药液及液体食品消毒灭菌的终端过滤，如大输液、针剂除菌过滤。生物制品除菌过滤。啤酒，葡萄酒除菌过滤。纯水，矿泉水的除菌过滤。

The terminal filtration is mainly suitable for liquid and liquid food sterilization, such as transfusion, injection filtering. Biological filtration. Beer, Wine filtering. Pure water, mineral water filtration.



技术参数

technical parameter

过滤精度：0.1、0.2、0.45、0.65、1 (μm)

Filtration accuracy: 0.1, 0.2, 0.45, 0.65, 1 (m)

滤芯长度：5"、10"、20"、30"、40"

Filter length: 5", 10", 20", 30", 40"

密封材料：哇橡胶、丁晴橡胶、三元乙丙橡胶、氟橡胶

Sealing material: Wow rubber, nitrile rubber,

EPDM rubber, fluorine rubber three

密闭方式：热熔焊接

Airtight way: hot melt welding

有效过滤面积：≥0.6m²/10"

Effective filtration area: 0.6 square meters /10"

最高工作温度：85℃，0.05Mpa

Maximum operating temperature: 85 degrees C, 0.05Mpa

最高耐受温度：140℃，0.28

MpaMaximum tolerance temperature: 140 degrees C, 0.28Mpa

最大正压差：0.42Mpa(25℃)

Maximum positive pressure difference: 0.42Mpa (25 DEG C)

最大反压差：0.21Mpa(25℃)

Maximum back pressure difference: 0.21Mpa (25 DEG C)

灭菌条件：121℃ 30min

Sterilization conditions: 121 degrees C 30min

其他：特殊规格直径及各种插口可以定制

Other special specifications: diameter and various sockets can be customized



管线式滤芯


Pipeline type filter element



能量石滤芯 Energy filter

能量石滤芯以能量石为过滤介质，吸附水中的重金属和污垢，净化氯气，淡除异味，具备普通滤芯的功能。除此之外，能量石加热后释放的远红外线和负离子能引起水分子共振，将大分子团水转化成小分子团水，转化后的水呈弱碱性，更贴近人体的能接收水份的PH值，这将更有利于机体养分的吸收，促进新陈代谢。

Energy stone filter with energy stones as the filtering medium, adsorption of heavy metals and dirt in the water, purification of chlorine, light in addition to smell, with ordinary filter function. In addition, the far infrared and negative ion releasing energy stone after heating, water molecules can cause resonance, large group of water molecules into small molecules of water, transformed into a weak alkaline water, closer to the human body can receive water pH value, which will be more conducive to the absorption of nutrients, promote the The new supersedes the old.

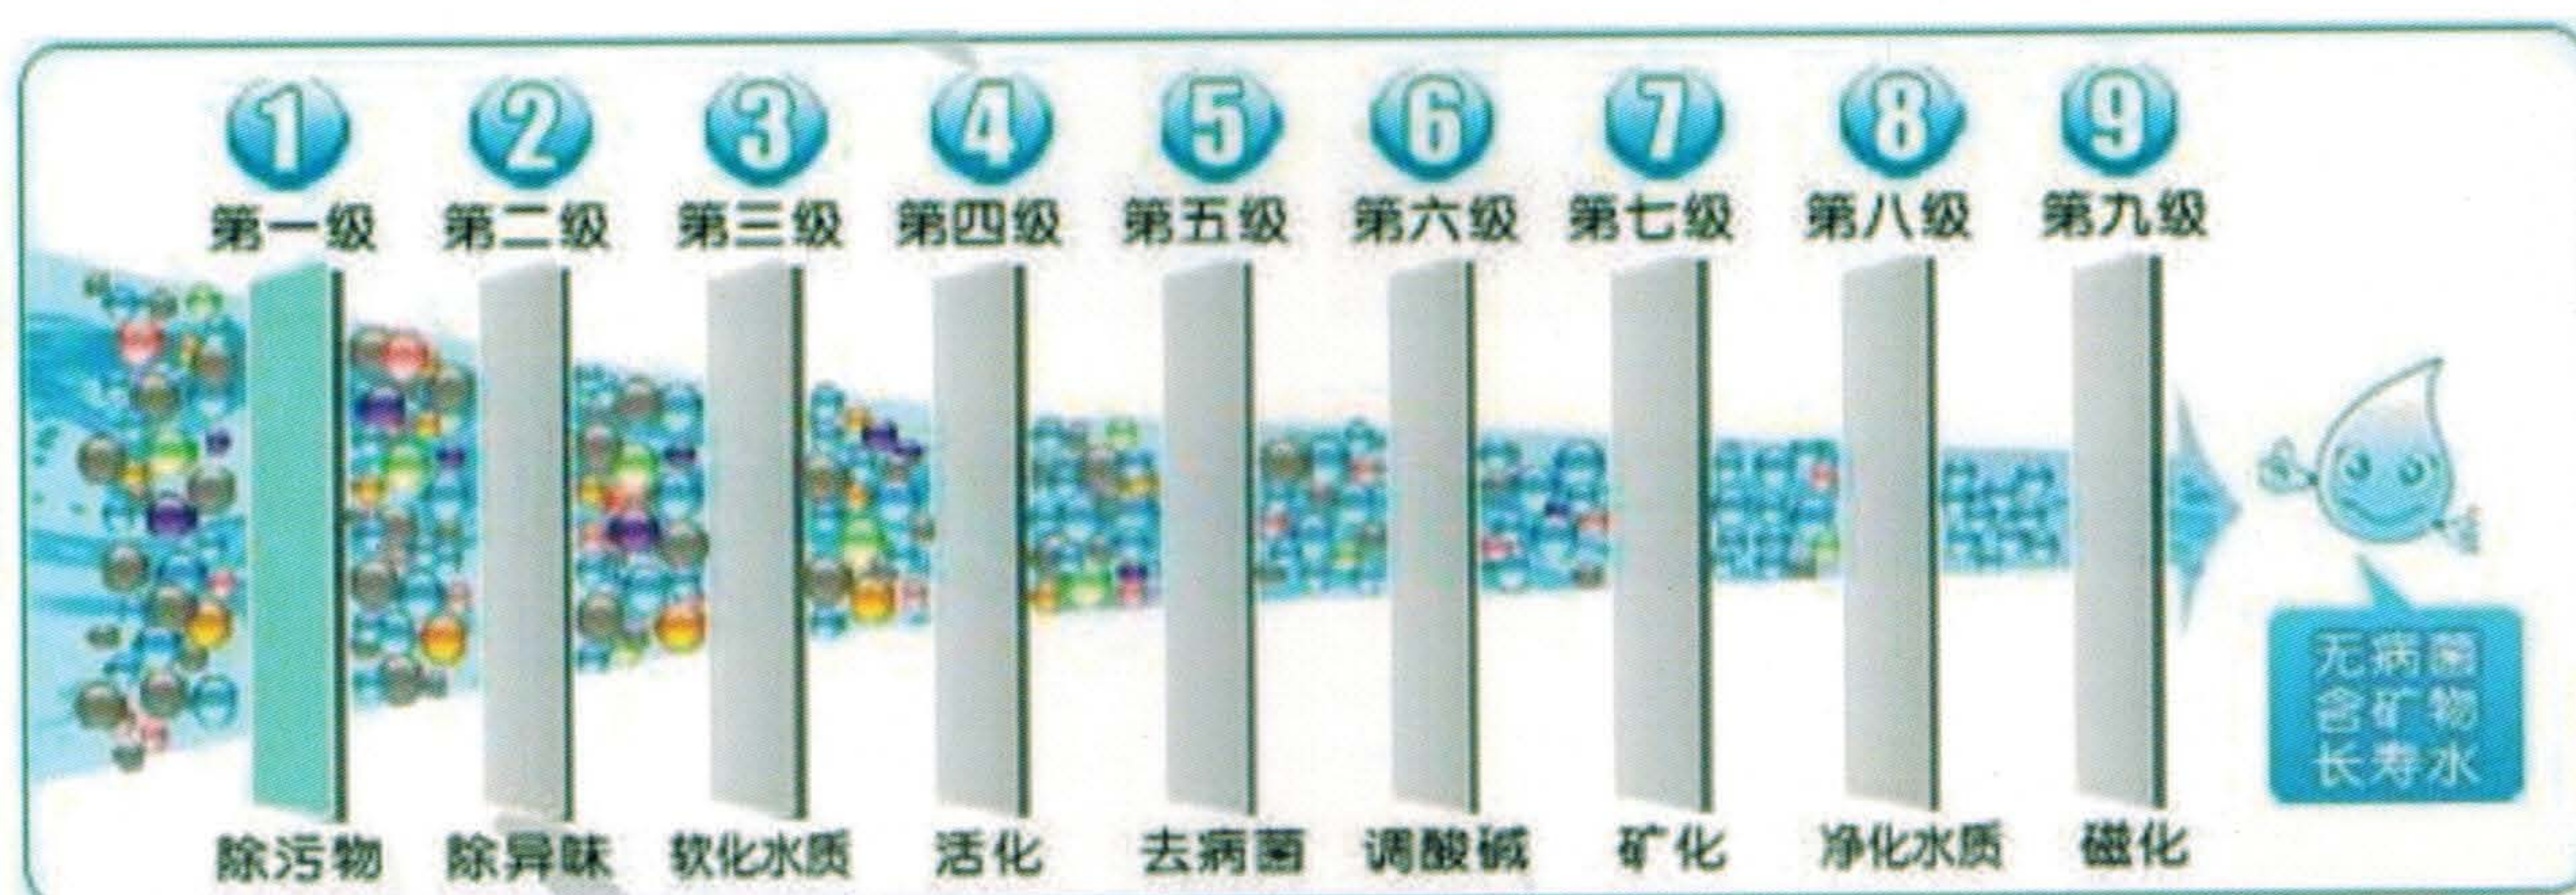



微孔折叠滤芯

Microporous folded filter element



聚丙烯折叠滤芯

Polypropylene folding filter element

主要特点main features

聚丙烯折叠滤芯Polypropylene folding filter element

1.它是一种固定型深层过滤芯，过滤精度范围可从0.1微米到.60微米，可选择度非常大。

1. is a kind of fixed deep filter, the filter can range from 0.1 microns to.60 microns, very large selectivity.

2.其特有的低压差，大通量，高纳污量，较低的经济费用和广泛的化学相容性，深受用户欢迎。

2.unique low dropout, high flux, high capacity, low cost and wide chemical compatibility, welcomed by users.

3.采用热熔焊工艺，牢固且无释放物，保证了最低的溶出物和确保无纤维脱落。

3 using the heat of welding technology, firmly and without the release of material, ensure the dissolution and ensure no fiber loss lowest.

4.使用后可用普通方法清洗或用高压消毒柜及蒸气灭菌。

4. after use, can be cleaned with ordinary methods or with high pressure sterilizer and steam sterilization.

应用

application

主要用于：酒类，饮料，纯净水，有机溶剂，医药，生物和血浆产品，压缩空气过滤等。

Mainly used in: alcohol, beverages, purified water, organic solvents, pharmaceuticals, biological and plasma products, compressed air filtration, etc..



技术参数technical parameter

过滤精度：0.1、0.2、0.45、0.65、1、3、5、10、20、30、60 (μm)

Filtration accuracy: 0.1, 0.2, 0.45, 0.65, 1, 3, 5, 10, 20, 30, 60 (m)

密封材料：哇橡胶、丁晴橡胶、三元乙丙橡胶、氟橡胶

Sealing material: Wow rubber, nitrile rubber,

EPDM rubber, fluorine rubber three

密闭方式：热熔焊接

Airtight way: hot melt welding

有效过滤面积：0.4-0.7m²、10"

Effective filtration area: 10 square meters, 0.4-0.7"

滤芯直径：69.0mm

Filter straight through: 69.0mm

最高工作温度：80℃，0.28Mpa

Maximum operating temperature: 80 degrees C, 0.28Mpa

最大正压差：0.42Mpa(25℃)

Maximum positive pressure difference: 0.42Mpa (25 DEG C)

最大反压差：0.28Mpa(25℃)

Maximum back pressure difference: 0.28Mpa (25 DEG C)

灭菌条件：121℃ 30min

Sterilization conditions: 121 degrees C 30min

产品结构图



聚醚砜折叠滤芯

Polyether ether ketone folding filter element

主要特点

main features

聚醚砜折叠滤芯有良好的化学相容性和独特的亲水性，能提供高水平的过滤精度和流量。对蛋白质及贵重生物制剂的吸附率比尼龙膜和醋酸纤维膜低。已成为制药工业，及食品工业等行业用于终端液体过滤的首选。滤膜面积百分之八十以上的微孔开孔率，及独特的微孔几何形状，大大的提高了过滤效率。

100%产品经出厂前完整性测试，生物安全指标符合国家标准。The poly (ether sulfone) folding filter has good chemical compatibility and unique hydrophilicity, which can provide high level of filtration precision and flow.

The adsorption rate of protein and valuable biological agent was lower than that of nylon membrane and acetate fiber membrane. Has become the pharmaceutical industry, and the food industry and other industries for the final selection of liquid filtration. The pore opening ratio of the membrane area is more than eighty percent, and the unique shape of the micropore greatly improves the filtration efficiency.

100% product integrity test before delivery, bio safety indicators in line with national standards.

应用

application

主要适用于药液及液体食品消毒灭菌的终端过滤，如大输液、针剂除菌过滤。生物制品除菌过滤。啤酒，葡萄酒除菌过滤。纯水，矿泉水的除菌过滤。

The terminal filtration is mainly suitable for liquid and liquid food sterilization, such as transfusion, injection filtering. Biological filtration. Beer, Wine filtering. Pure water, mineral water filtration.



技术参数

technical parameter

过滤精度：0.1、0.2、0.45、0.65、1 (μm)

Filtration accuracy: 0.1, 0.2, 0.45, 0.65, 1 (m)

滤芯长度：5"、10"、20"、30"、40"

Filter length: 5", 10", 20", 30", 40"

密封材料：哇橡胶、丁晴橡胶、三元乙丙橡胶、氟橡胶

Sealing material: Wow rubber, nitrile rubber,

EPDM rubber, fluorine rubber three

密闭方式：热熔焊接

Airtight way: hot melt welding

有效过滤面积：≥0.6m²/10"

Effective filtration area: 0.6 square meters /10"

最高工作温度：85℃，0.05Mpa

Maximum operating temperature: 85 degrees C, 0.05Mpa

最高耐受温度：140℃，0.28

MpaMaximum tolerance temperature: 140 degrees C, 0.28Mpa

最大正压差：0.42Mpa(25℃)

Maximum positive pressure difference: 0.42Mpa (25 DEG C)

最大反压差：0.21Mpa(25℃)

Maximum back pressure difference: 0.21Mpa (25 DEG C)

灭菌条件：121℃ 30min

Sterilization conditions: 121 degrees C 30min


其他：特殊规格直径及各种插口可以定制

Other special specifications: diameter and various sockets can be customized



UDF椰壳活性炭滤芯

Granular activated carbon filter

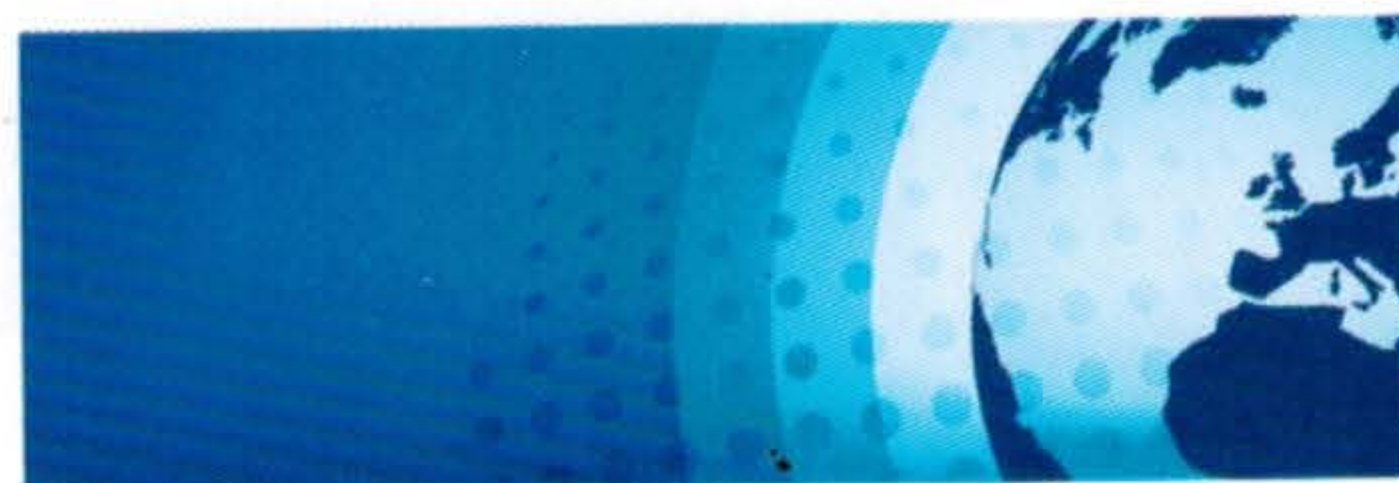

椰壳活性炭滤芯是以优质的果壳炭为原料，辅以食用级粘合剂，采用高科技技术，经特殊工艺加工而成，它集吸附、过滤、截获、催化作用于一体，能有效去除水中的有机物、余氯及其他放射性物质，并有脱色、去除异味的功效。具有孔隙发达、吸附性能好、强度高、易再生、经济耐用等优点。

Coconut shell activated carbon filter core is made of high quality fruit shell charcoal as raw material, supplemented by edible grade adhesive. It is made of high tech technology and processed by special technology. It combines adsorption, filtration, interception and catalysis. It can effectively remove organic matter, residual chlorine and other radioactive substances in water. It also has the work of decolorizing and removing odor. Effect. It has the advantages of well-developed pore, good adsorptive property, high strength, Yi Zaisheng, economy and durability.

椰壳活性炭颗粒炭滤芯

超强洁净吸附

名称	10寸椰壳活性炭颗粒炭滤芯
更换周期	6-8个月
尺寸	高25cm 外径7.0cm、内径3cm
产品材料	椰壳活性炭
重量	0.35kg

功能：可去除有机化学物、异味、臭味、消毒、污染和悬浮颗粒，去除99%的氯，并可处理高达1750ppm的氯（UDF 2PPM氯含量为定值状态下）有效去除95%以上的VOCs挥发性有机物，达1750ppm。

活性炭参数

比表面积	800-1000m ² /g
碘吸附值	900-1000 mg/g
苯吸附值	20-50%
四氯化碳吸附率	50-60%
亚甲基蓝吸附率	13-16ml/g
灰分含量	≤3.5%

强效吸附

3级



精选椰壳烧制



椰壳活性炭

椰壳活性炭，有效吸附中余氯，异色异味，部分重金属及离子化合物。



高级混合净化

此款为10寸椰壳活性炭中A级产品：为颗粒状之高吸收性能椰壳活性炭，可完全除去水中的二氯化烯、漂白剂、农药、氯、臭味异味及其他有害之化学毒物，以及致癌手三氯甲烷。

椰壳活性炭滤芯介绍及质量

安全品质

椰壳活性炭滤芯介绍

在水处理行业中，活性炭分为“矿石”“植物”两大类。常规称为煤质活性炭及椰壳活性炭，两种类别之间成本相差巨大。


目前以国内最差的椰壳活性炭为例，1吨均价>10000元，1吨能做多少颗粒活性炭？1500-2000支左右，所以一支颗粒活性炭仅“碳成本”需要7-9元左右。那么为什么有的活性炭才卖7-9元左右，这就牵扯到关于活性炭材料问题。

回收碳：通过采购以饱和活性炭进行灌装销售，回收碳一般来自污水处理厂以及来自水公司这些用碳大户，而且回收碳是不需要成本的，因为这些活性炭如果没有人收，污水处理厂或自来水公司还要花钱请人运走。回收碳有多大的危害？只能用最通俗的一句话。原本自来水没有重金属，它可以让你有。使用这种滤芯还不如不装净水器。

3大核心能力

3 CORE COMPETENCIES THE INDUSTRY ABSOLUTE LEADER

吸附强，流量大，更卫生，更安全，更健康！

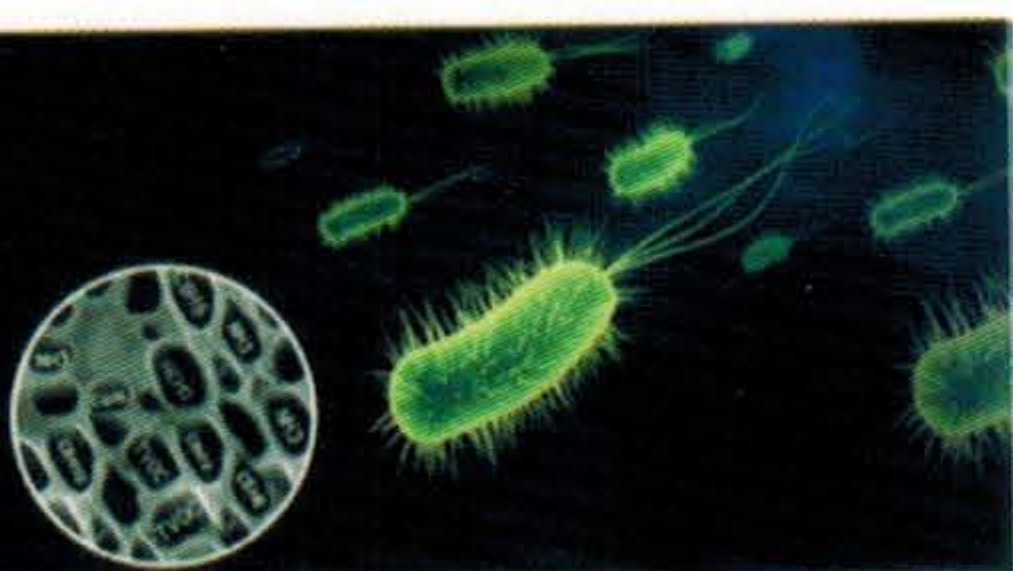

超强吸附椰壳活性炭

高效吸附水中异色异味、余氯、悬浮物、泥沙、铁锈。同时抑制细菌滋生使净水的到深层净化。






特效离子阻垢滤芯

Special effect ion scale inhibition filter



通过与水中的钙、镁等离子作用,阻止碳酸钙晶体的生成和凝聚,并对已经生成的碳酸钙晶粒起到分散作用,从而达到阻垢作用;此外,还能在管道内表面形成保护膜,防止水中溶解氧及氯离子等腐蚀性离子对金属表面的侵蚀,从而起到防腐效果。

Through the action of calcium and magnesium plasma in the water, the formation and condensation of calcium carbonate crystals are prevented, and the formed calcium carbonate grains are dispersed to achieve scale inhibition. In addition, the protective film can be formed on the inner surface of the pipeline to prevent corrosion of corrosionions such as dissolved oxygen and chloride ions in water, and And it has the effect of anticorrosion

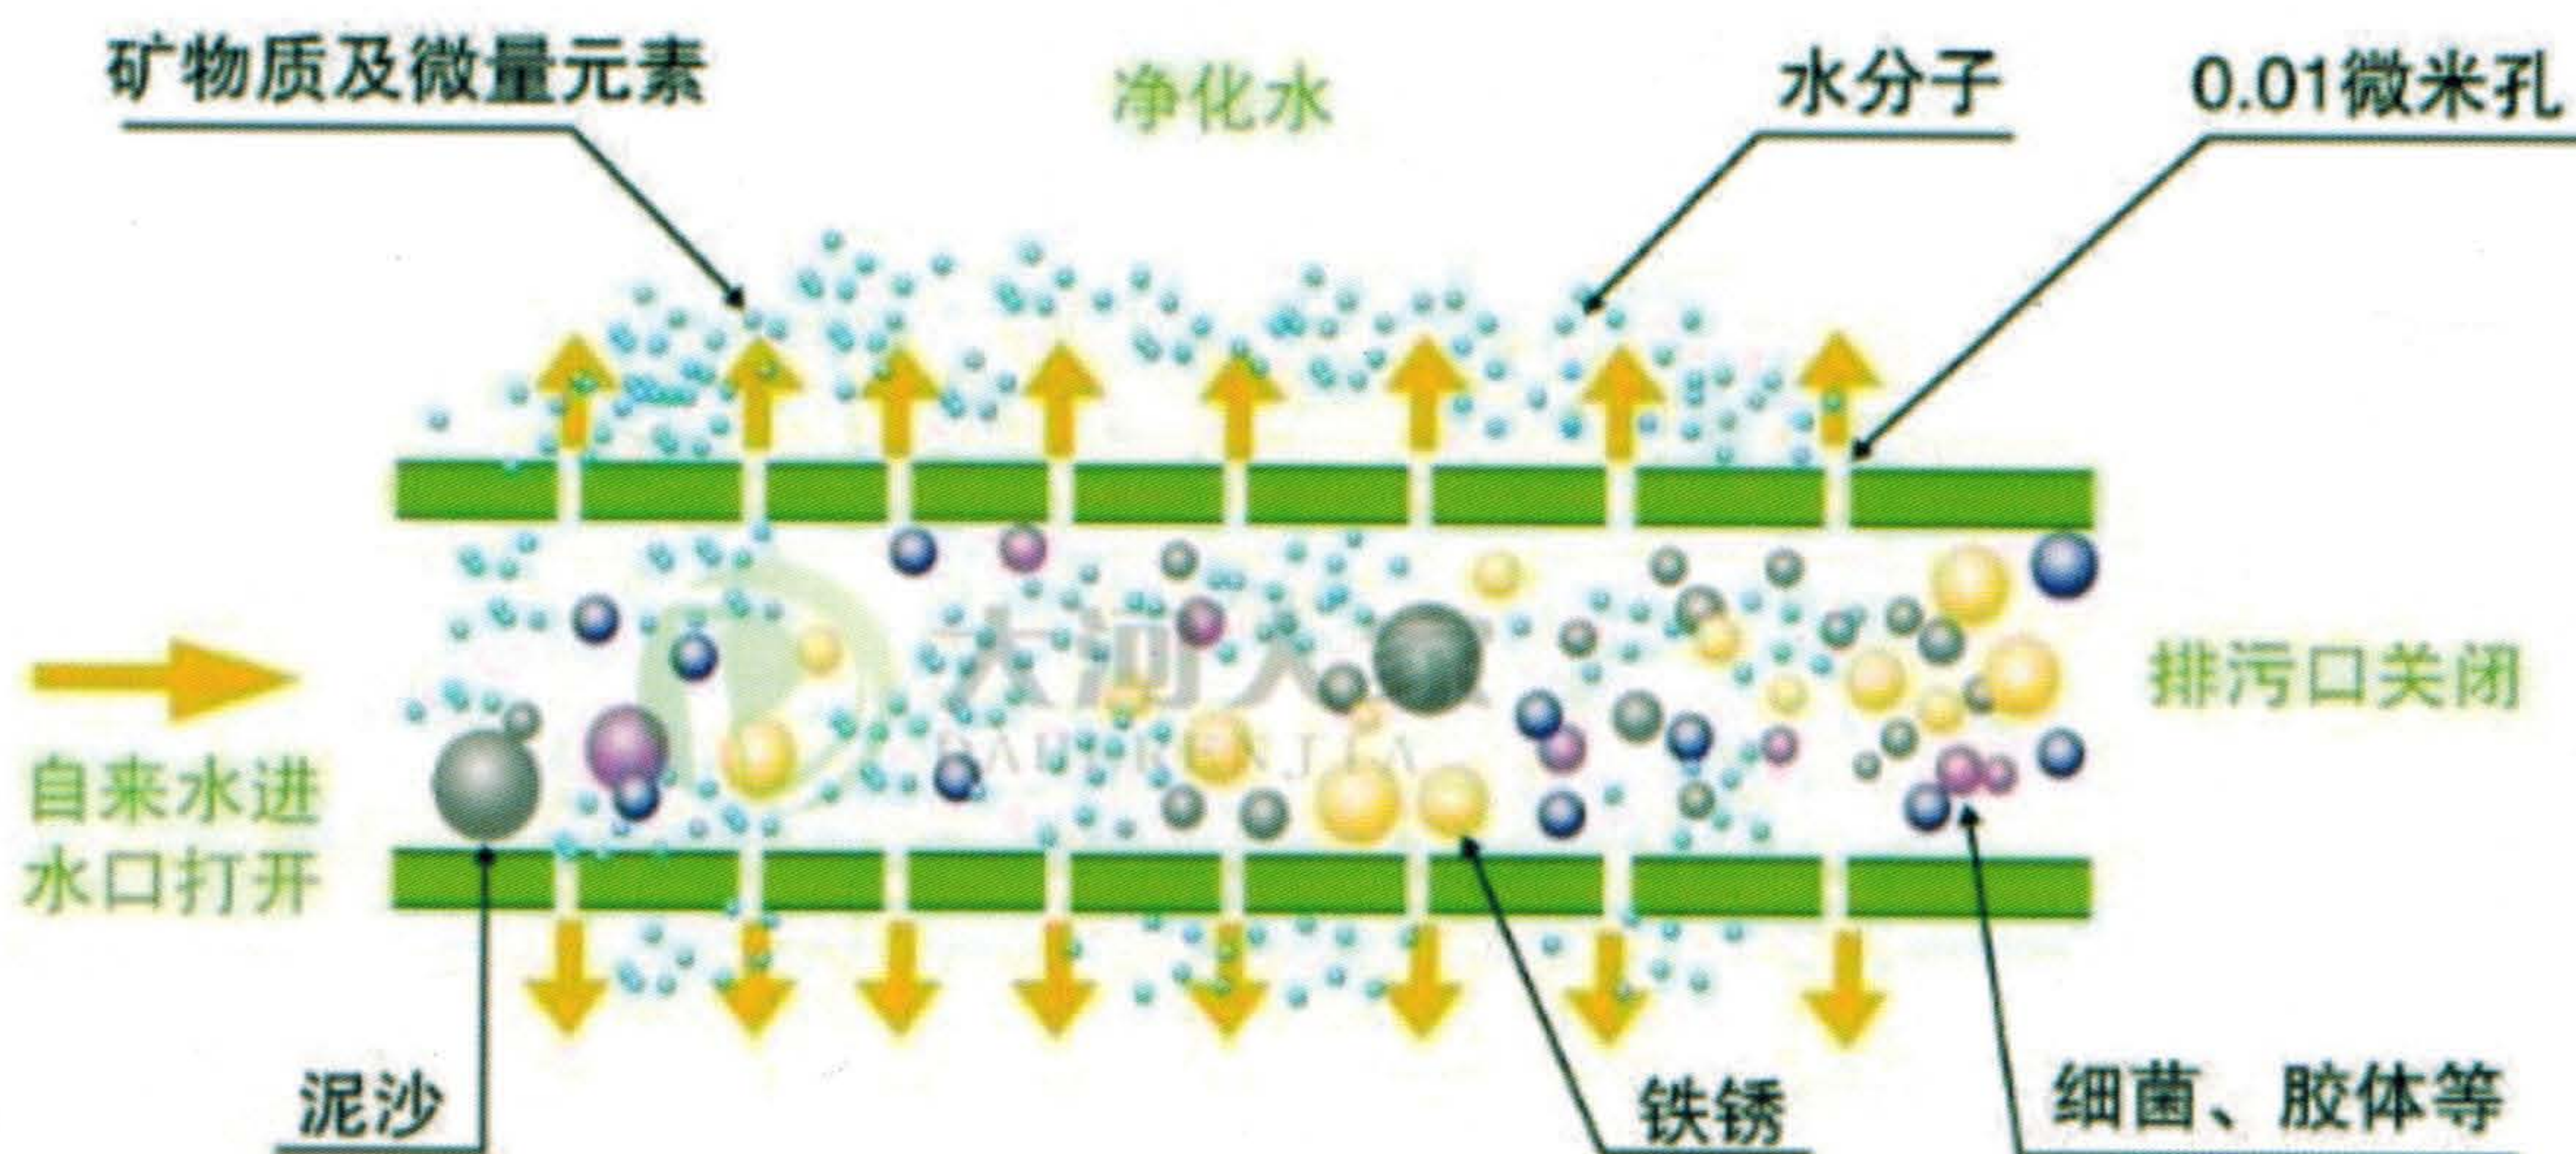


用水更安全 口感绵柔甘甜

滤除水中有害物质, 保留矿物质

Water purifier filter elements are generally KDF and activated carbon, filter core is to make the polluted water is clean to the production, life needs of the state, that is to make the water to a certain degree of cleanliness. Remove solid particles from water, kill bacteria, and eliminate harmful chemicals.

有效过滤 去除水垢

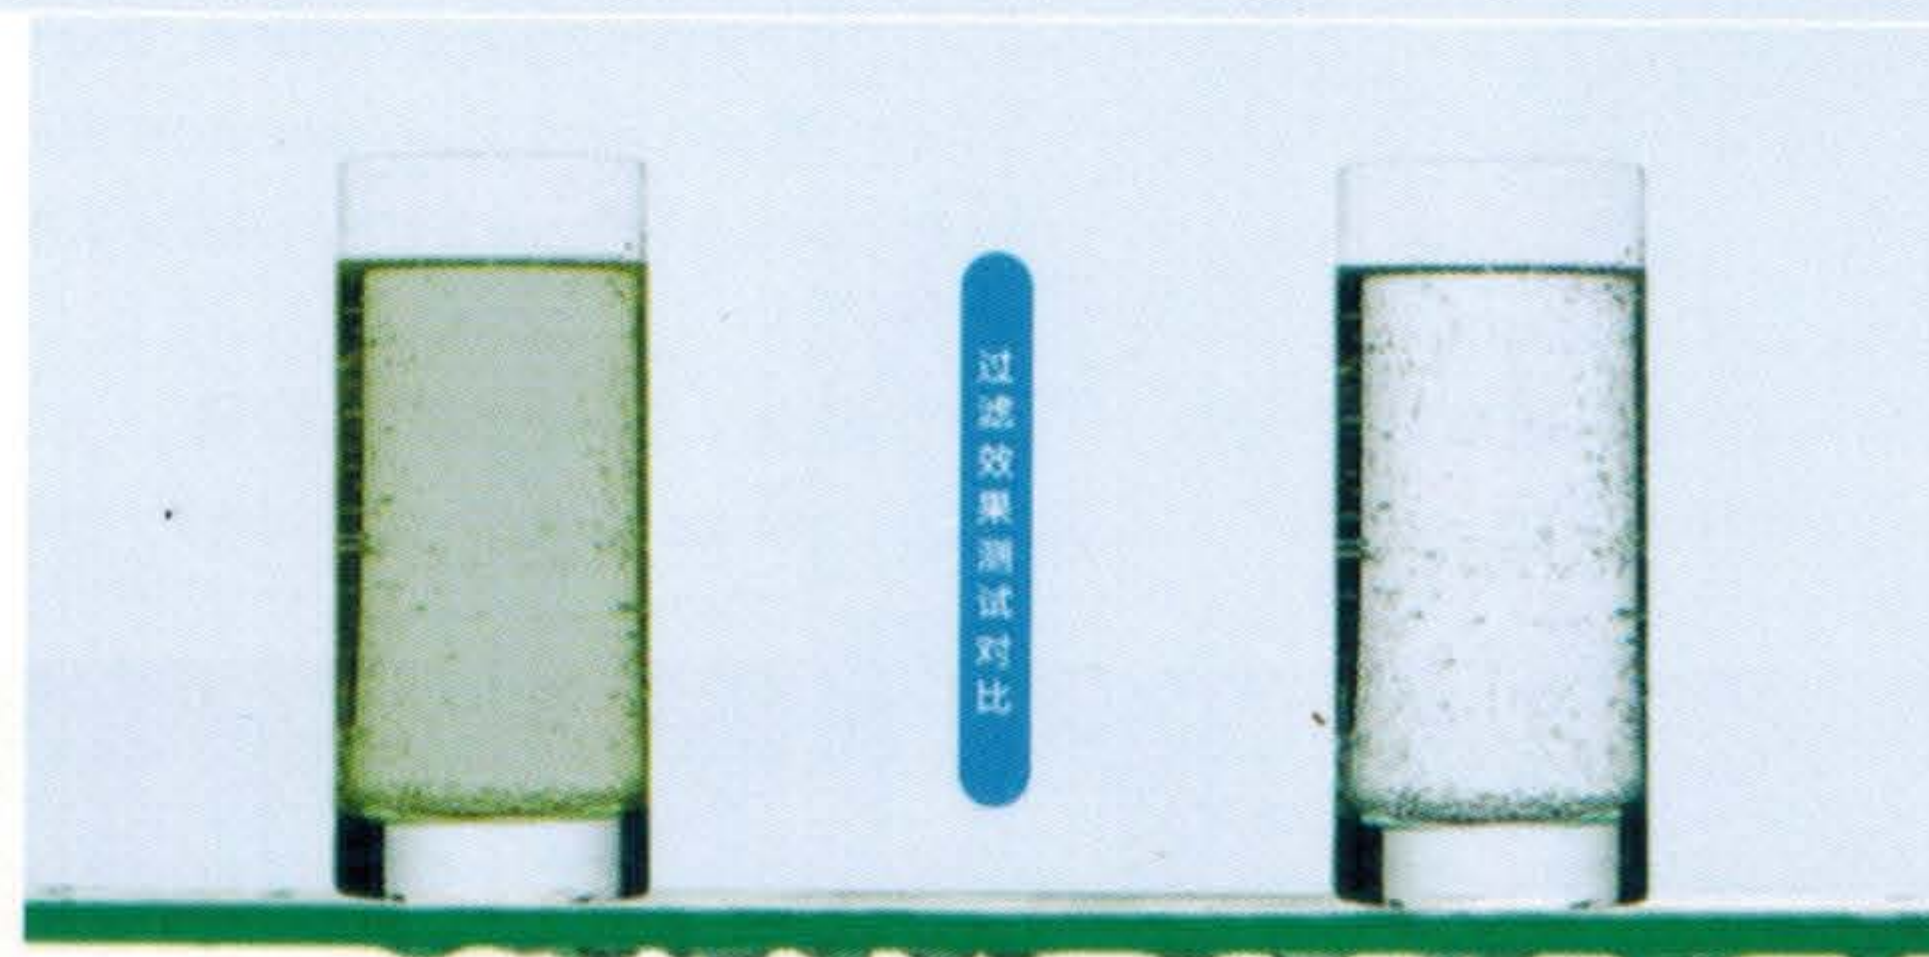

品质生活 从“芯”开始

生活在于细节, 从饮水开始, 过品质生活

