C 企业简介 ompany Profile

景津环保股份有限公司,创立于1988年,是一家集过滤成套装备制造、过滤技术整体方案解决、环保工程总承包及运营于一体的综合环保服务商,中国环保产业协会副会长单位,压滤机国家标准主起草人,"景津"商标被认定为"中国驰名商标",并取得马德里国际商标注册保护。景津连续十七年压滤机产销量世界排名第一,滤布产销量连续四年世界排名第一,产品远销123个国家和地区。我们胸怀大国工匠之心,让景津产品服务了全世界,更重要的是得到了他们的尊重。 景津秉持与时俱进、即时创新,为客户创造最大的价值!不断创造出颠覆性创新的技术和产品,引领着市场的发展。致力于发展成为世界环保领域最具影响力的综合服务商。

Jingjin Environmental Protection Inc. was founded in 1988. The company is a complex environmental protection service provider of filter outfit production, filter technology overall plan solution and environmental protection project contraction and operation. It is also the vice-president unit of China Environmental Protection Industry Association and the primary drafter of national standards for filter press. Jingjin trademark has been recognized as a 'Famous Chinese Trademark', and is also protected by Madrid International Trademark Registration. Jingjin filter press's production capacity and sales volume remain the largest worldwide for seventeen consecutive years, and Jingjin filter cloth's production capacity and sales volume remain the largest worldwide for four consecutive years, and our products sell to 123 countries and regions. We hold the belief that being the best craftsman of the nation, and make products serve the world, most importantly, obtained the respect and applause from our customer. Jingjin adheres to the concept that keeping pace with the times, instant innovation, and creating maximum value for users! We keep creating innovative technology and products, leading the development of market. We are committed to becoming the most influential comprehensive service provider in the environmental protection field in the world.






景津总部(占地7万平米) HEADQUARTERS OF JINGJIN (covering 70,000 square meters)




1



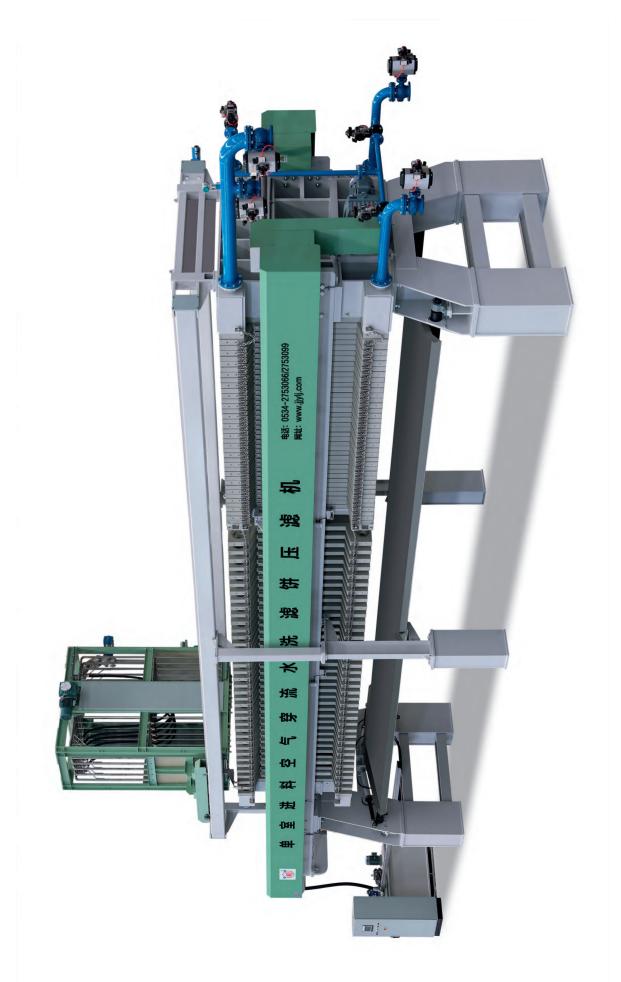


单室进料空气穿流水洗滤饼压滤机 Single chamber feeding with air blowing&cake washing filter press

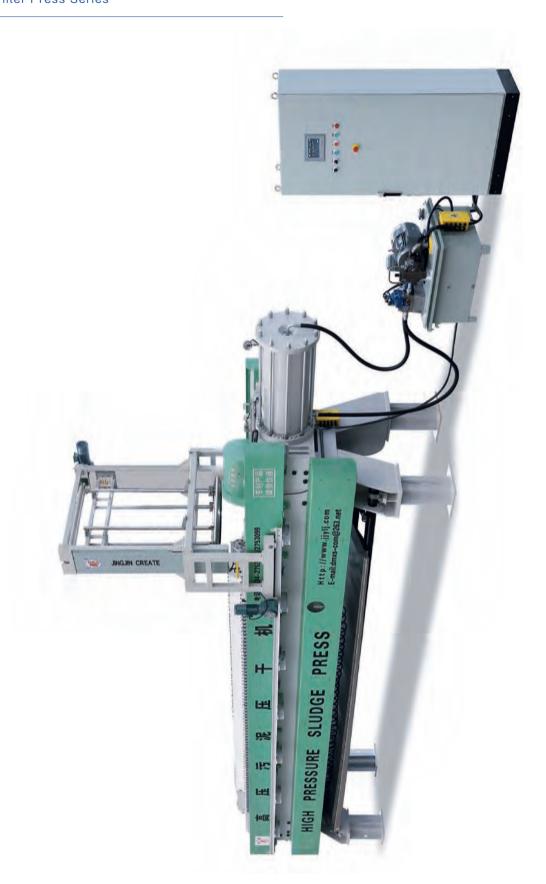

鼓膜100公斤高压污泥压干机 High pressure sludge press with 10Mpa



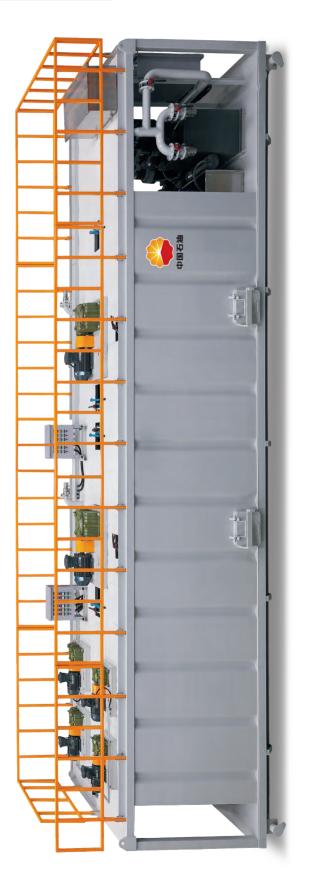

进入含水率83%-60%的滤饼 Filter cake with moisture content of 机 쌫 + 去 鲗 麻 福 压 和

这是处理后含水率5%-40%的颗粒 This is the particle with a moisture content of 5%-40% after treatment.

21

油田污泥不落地处理系统 Oil field slurry treatment syste

22


滤板系列 ilter Plate Series





滤板是压滤机的核心过滤元件。滤板材质、形式以及质量的不同,会对整机的过滤性能产生不同的影响。其进料径,滤点的分布(过滤通道)及其出水通道,对不同物料有不同的设计方案。景津滤板材质为进口TPE弹性体及高强度聚丙烯,使滤板既有橡胶滤板的弹性,又有聚丙烯滤板的韧性、刚性,使滤板压紧时密封性能更好。景津滤板各项技术指标均按欧盟标准生产。景津聚丙烯高压隔膜滤板最大鼓膜压力达10Mpa,代表了世界最高水平。

Filter plate is the core part of the filter press. Different materials, models and qualities of filter plate will have different affects on the filteration performance of the whole machine. Its feeding hole, filtering point distribution (filtering channel) and water discharging channels have different designs according to different materials. Jingjin filter plate adopts imported TPE elastomer and high intensity PP to make the filter plate not only has the flexibility of the rubber plate, but also has the tenacity and rigidity of the polypropylene plate, ensuring the airtightness of the filter plate during the progress of pressing. All technical indicators of Jingjin filter plate strictly comply with EU standard. The maximum membrane inflation pressure of Jingjin high pressure PP membrane filter plates can be up to 10Mpa, representing the most advanced level around the world.

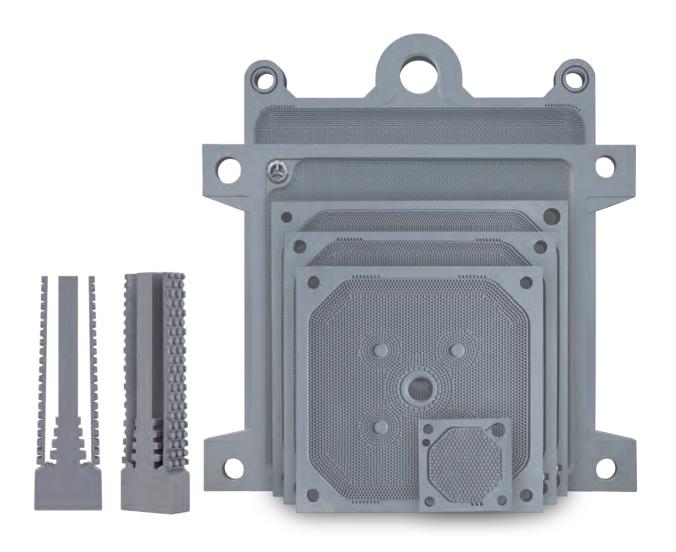

29 30