




WATER TECHNOLOGY  
HOUSEHOLD SERIES

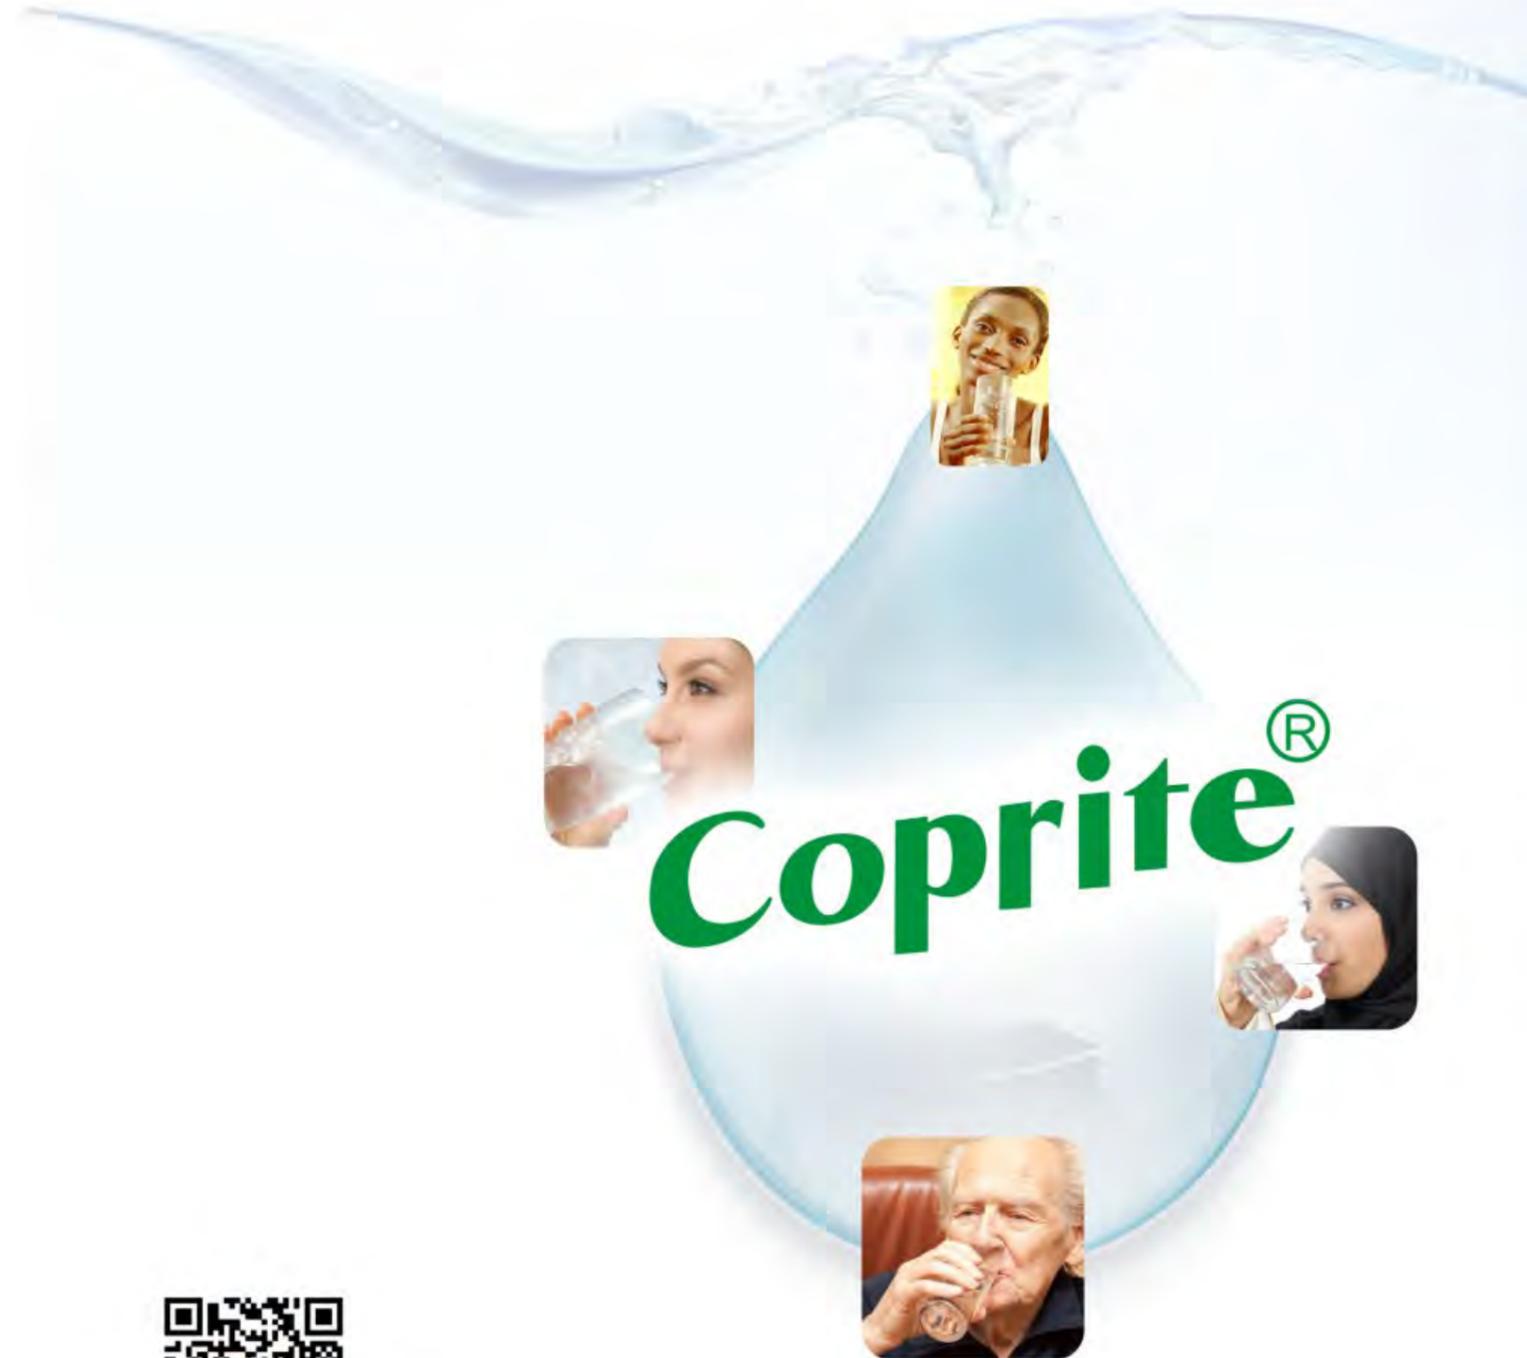

**Coprite®**

余姚市科普特水处理设备厂  
YUYAO COPRITE WATER TREATMENT FACTORY  
ADD:NO.42ChangXinRoad,Yuyao City Zhejiang Province.China.

余姚市科科国际贸易有限公司  
YUYAO KOKO INTERNATIONAL TRADING CO.,LTD  
ADD:NO.55 YuLiRoad,Yuyao City Zhejiang Province.China.  
TEL: 0086 - 574 - 62714188 62726717  
FAX: 0086 - 574 - 62724188  
http: // www.kokoelectric.com  
E-mail: koko@kokoelectric.com



2018/2019

# INTRODUCTION

Yuyao Coprite Water Treatment Factory is one of the leading manufacturer and exporter of household electrical appliances. Our main lines now include reverse osmosis systems, water dispensers, water purifiers, water filters, filter housings, cartridges, faucets and water purifier spare parts. Our head office is located in the center of Yuyao city, close to Beilun Port, one of largest export facilities in China. We have a team of in-house QC personnel who are responsible for ensuring that all operations are conducted in line with ISO9002 standards. Having received GS, CE, CB certifications for various product series, we are now achieving high sales shares in markets worldwide. Manufacturing exclusively for export, we have formed business relations with buyers in Europe, Middle East and Southeast Asia. Moreover, we are currently working to extend our sales channels into North America.

Adhering to the principles of "Quality ensures our survival", "Advanced management makes us develop" and "Wisdom brings wealth", we hope to cooperate with all partners for mutual success. Welcoming correspondences from interested companies around the world, we hope to hear from you soon.



Water dispenser with filtration	01-04
Water dispenser	05-06
S/S water dispenser with filtration	07
Box ro system	08
Box ro system with heating	09
Box ro system	10
Reverse osmosis system	11-13
Water filters	14-15
UF system	16
Water filter housing	17-18
Tap filter&shower filter	19-20
Water filter cartridge	21-23
UF membrane filter cartridge	24
Quick fitting	25-26
RO system component	27-29
Goose neck faucet	30
Water purifier pot	31-32
Water pump&purifier pitcher	33
Ultraviolet sterilizer	34
Stainless steel water purifier	35
Stainless steel UF purifier	36
Water distributor series	37-38
FRP control valve	39
FRP pressure vessels	40
Water dispenser tap	41-42

# WATER DISPENSER WITH FILTRATION




KKT2305


Filter Precision	0.01μ
Outflow Rate	3L/min
Product Size	30x39x53.4cm
Packing Size	34.5x43.5x58.2cm
Loading Qty (20'FT / 40'HQ)	320/660/755PCS

Color ● ●


UF filtration

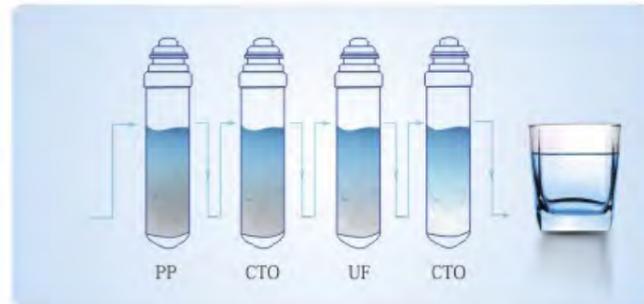


RO filtration

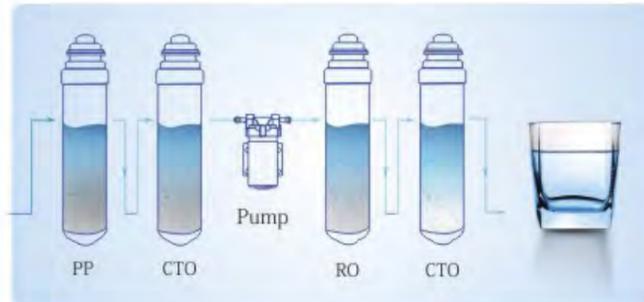

UF filtration

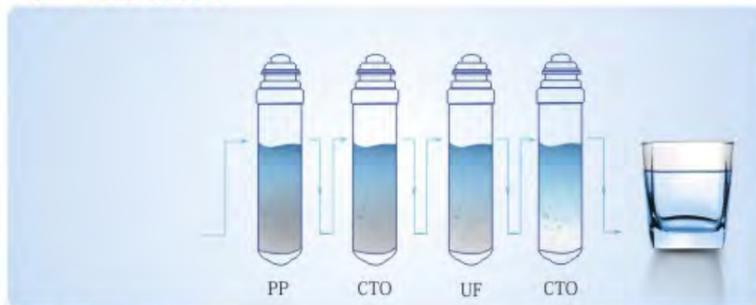

RO filtration

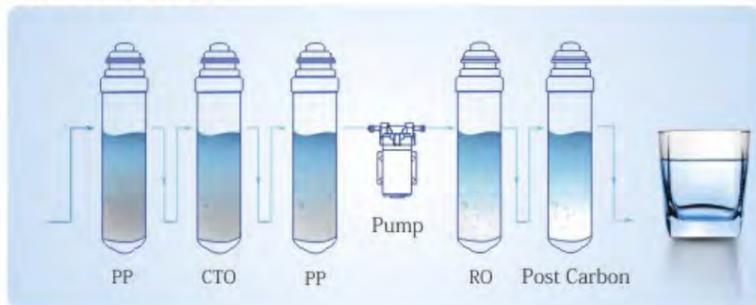

— Product Data —

Filter Precision	0.01μ
Outflow Rate	3L/min
Product Size	30x39.5x111cm
Packing Size	34.5x43.5x116.5cm
Loading Qty (20'FT / 40'HQ)	160/340PCS

KK2305  
KK2305-RO  
color ● ● ●



# WATER DISPENSER WITH FILTRATION




KKT2105


Filter Precision	0.01μ
Outflow Rate	3L/min
Product Size	30x39x53.4cm
Packing Size	34.5x43.5x58.2cm
Loading Qty (20'FT / 40'HQ)	320/660/755PCS

Color ● ● ●


UF filtration

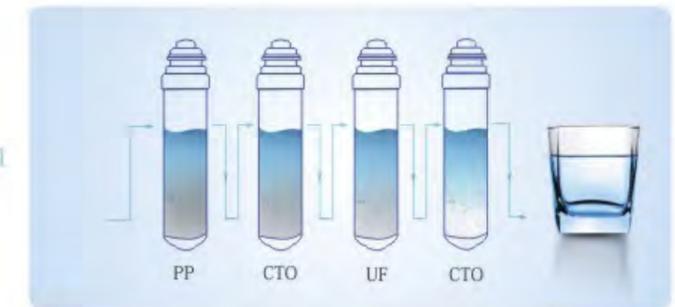


RO filtration

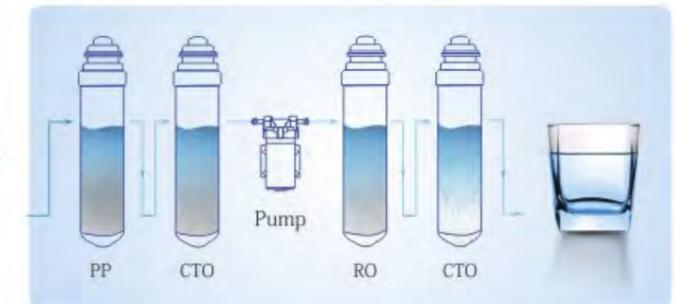

UF filtration

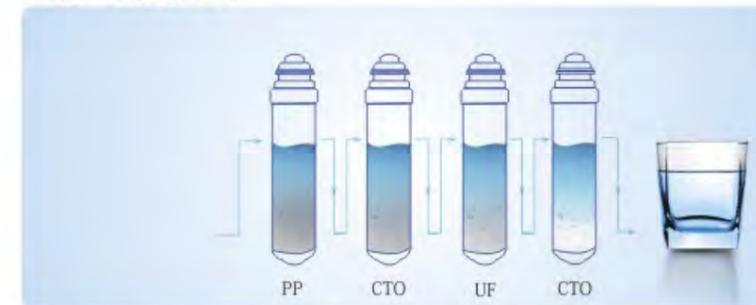

RO filtration

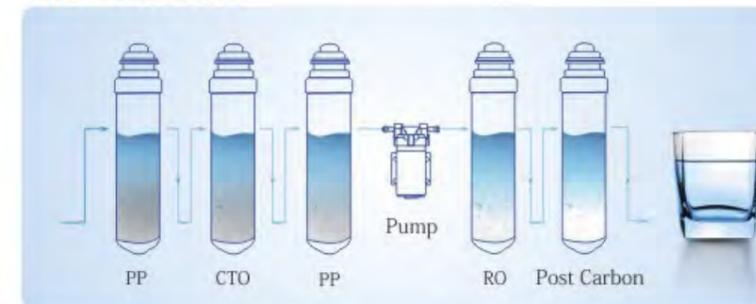

— Product Data —

Filter Precision	0.01μ
Outflow Rate	3L/min
Product Size	30x39.5x111cm
Packing Size	34.5x43.5x116.5cm
Loading Qty (20'FT / 40'HQ)	160/340PCS



KK2105  
KK2105-RO  
color ● ● ●




WATER DISPENSER WITH FILTRATION

WATER DISPENSER WITH FILTRATION

# WATER DISPENSER WITH FILTRATION




UF filtration

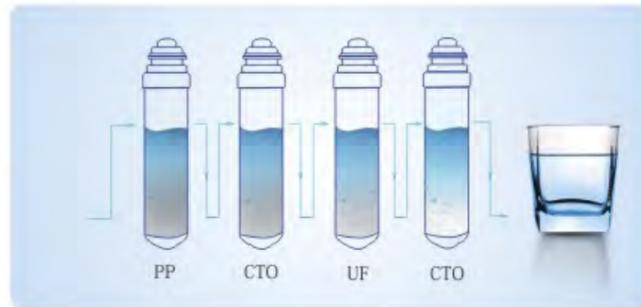

KKT509


Filter Precision	0.01μ
Outflow Rate	3L/min
Product Size	26x42x47cm
Packing Size	29x47x51.5cm
Loading Qty (20'FT / 40'HQ)	376/760/840PCS

RO filtration

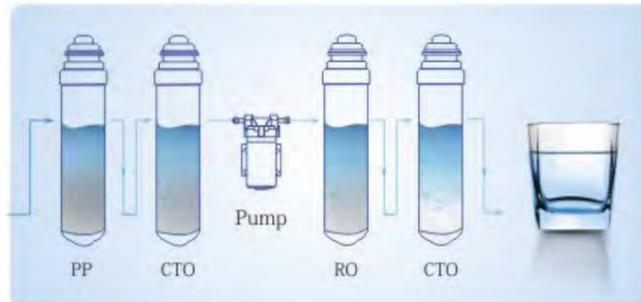


Color ●●●●●●●●

UF filtration

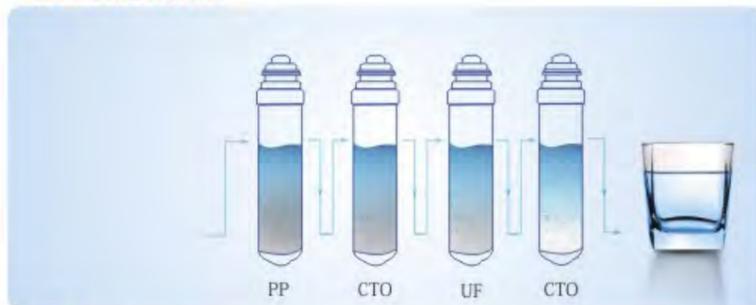

RO filtration

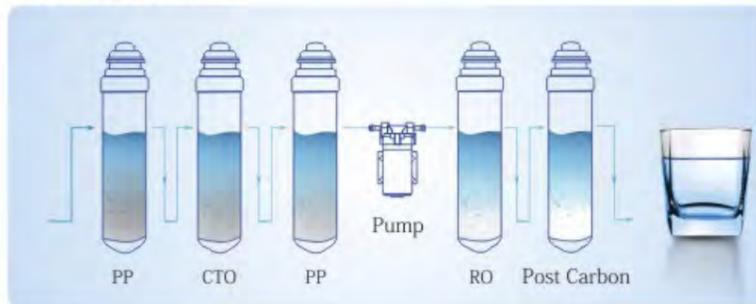

KK509

color ●●●●●●●●


— Product Data —

◆ Filter Precision	0.01μ
◆ Outflow Rate	3L/min
◆ Product Size	26x33x101cm
◆ Packing Size	29x36x103.5cm
◆ Loading Qty (20'FT / 40'HQ)	240/573PCS

# WATER DISPENSER WITH FILTRATION




UF filtration

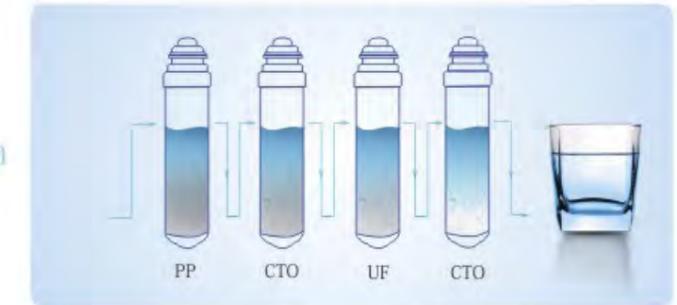

KKT2350


Filter Precision	0.01μ
Outflow Rate	3L/min
Product Size	30x39x53.4cm
Packing Size	34.5x43.5x58.2cm
Loading Qty (20'FT / 40'HQ)	320/660/755PCS

RO filtration

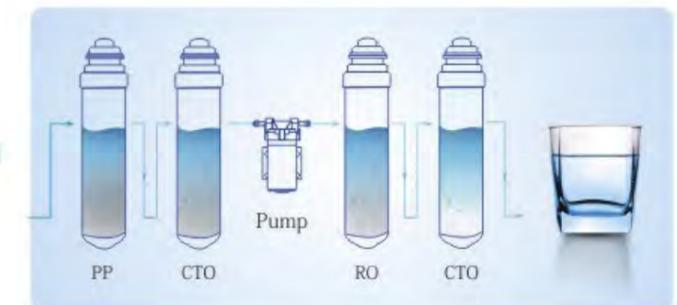


Color ●●●●●●●●

UF filtration

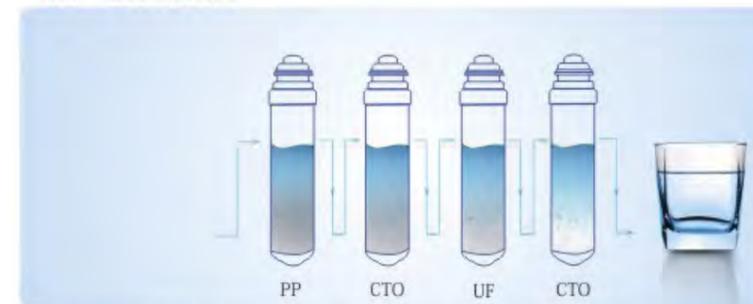

RO filtration

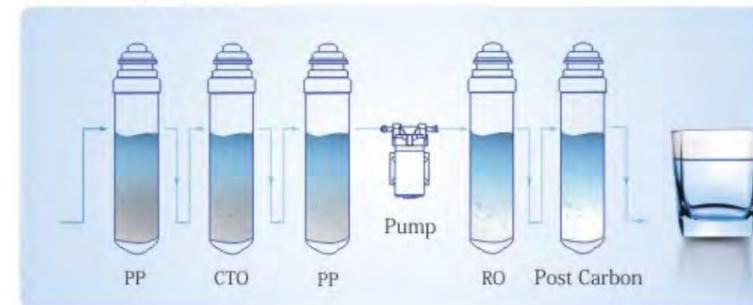

KK2350  
KK2350-RO

color ●●●●●●●●

— Product Data —

◆ Filter Precision	0.01μ
◆ Outflow Rate	3L/min
◆ Product Size	30x39.5x111cm
◆ Packing Size	34.5x43.5x116.5cm
◆ Loading Qty (20'FT / 40'HQ)	160/340PCS

# WATER DISPENSER

# WATER DISPENSER

WATER DISPENSER

WATER DISPENSER



**BY70**  
Product Size 31x33.6x96.6cm  
Packing Size 36.5x37x100cm  
Loading Qty 180 / 454PCS  
(20'FT / 40'HQ)



**BY82**  
Product Size 31x32.3x96.6cm  
Packing Size 35x36x98.5cm  
Loading Qty 192 / 466PCS  
(20'FT / 40'HQ)



**BY82-1**  
Product Size 31x33.6x96.6cm  
Packing Size 35x36x98.5cm  
Loading Qty 192 / 466PCS  
(20'FT / 40'HQ)



**BY82-2**  
Product Size 31x33.6x96.6cm  
Packing Size 35x36x98.5cm  
Loading Qty 192 / 466PCS  
(20'FT / 40'HQ)



**BYT90**  
Product Size 31x33.2x52.6cm  
Packing Size 35x36x56cm  
Loading Qty 384 / 792PCS  
(20'FT / 40'HQ)



**BYT106-1**  
Product Size 31x33.4x52.6cm  
Packing Size 35x36x56cm  
Loading Qty 384 / 792PCS  
(20'FT / 40'HQ)



**BYT82-1**  
Product Size 31x33.6x52.9cm  
Packing Size 35x36x55.5cm  
Loading Qty 384 / 792PCS  
(20'FT / 40'HQ)



**BY82-3**  
Product Size 31x33.6x96.6cm  
Packing Size 35x36x98.5cm  
Loading Qty 192 / 466PCS  
(20'FT / 40'HQ)



**BY90**  
Product Size 31x33.2x95.5cm  
Packing Size 35x36x99.5cm  
Loading Qty 192 / 466PCS  
(20'FT / 40'HQ)



**BY93**  
Product Size 31x33.4x96.5cm  
Packing Size 35x36x99.5cm  
Loading Qty 192 / 466PCS  
(20'FT / 40'HQ)



**BY106**  
Product Size 31x33.4x96.5cm  
Packing Size 35x36x99.5cm  
Loading Qty 192 / 466PCS  
(20'FT / 40'HQ)



**BYT90**  
Product Size 31x32.3x52.9cm  
Packing Size 35x36x55.5cm  
Loading Qty 384 / 792PCS  
(20'FT / 40'HQ)



**BDT1152**  
Product Size 29.5x33x42.5cm  
Packing Size 32x35x44cm  
Loading Qty 560 / 1428PCS  
(20'FT / 40'HQ)



**BDT1162**  
Product Size 27.5x27.5x38cm  
Packing Size 29x31x41cm  
Loading Qty 811 / 1872PCS  
(20'FT / 40'HQ)

# S/S WATER DISPENSER WITH FILTRATION



**KK-195-5**

Hot, cold and room temperature water 120V/220V, 50Hz/60Hz, 1000W Hot tank 5L, cold tank 3L

**KK-195-10**

Hot, cold and room temperature water 120V/220V, 50Hz/60Hz, 1000W Hot tank 10L, cold tank 3L

**KK-196-5**

Hot and room temperature 120V/220V, 50Hz/60Hz, 800W Hot tank 5L

**KK-196-10**

Hot and room temperature 120V/220V, 50Hz/60Hz, 1500W Hot tank 10L

KK-195/6



**KK-291-5**

Hot, cold and room temperature water 120V/220V, 50Hz/60Hz, 1000W Hot tank 5L, cold tank 3L

**KK-292-5**

Hot and room temperature 120V/220V, 50Hz/60Hz, 800W Hot tank 5L

KK-291/2



**KK-312**

cold and room temperature 120V/220V, 50Hz/60Hz, cold tank 2.2L



**KK-311**

cold and room temperature 120V/220V, 50Hz/60Hz, cold tank 2.2L

# BOX RO SYSTEM




**KK-RO3H**



Hole size

## RO filtration

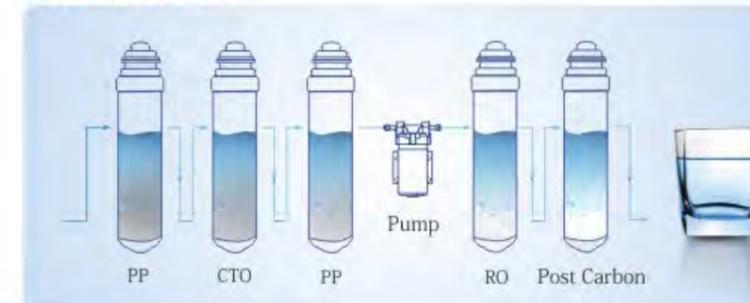

**KK-RO5H with inside water tank(7L)**



Hole size

S/S WATER DISPENSER WITH FILTRATION

BOX RO SYSTEM

## BOX RO SYSTEM WITH HEATING




**KK-RO5HD-1**  
HOT&NORMAL  
INSIDE WATER TANK:7L  
HEATING TANK:1L



**KK-RO5HD-2**  
HOT&NORMAL  
INSIDE WATER TANK:5L  
HEATING TANK:0.8L

### RO filtration

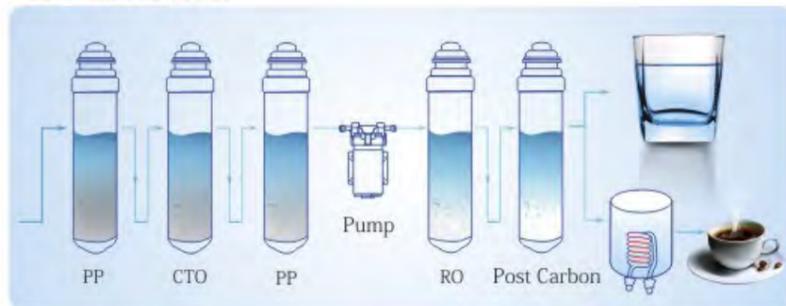

**KK-RO5HD-3**  
HOT&NORMAL  
INSIDE WATER TANK:4L  
HEATING TANK:0.8L




## BOX RO SYSTEM



**KK-RO3HB**




### RO filtration

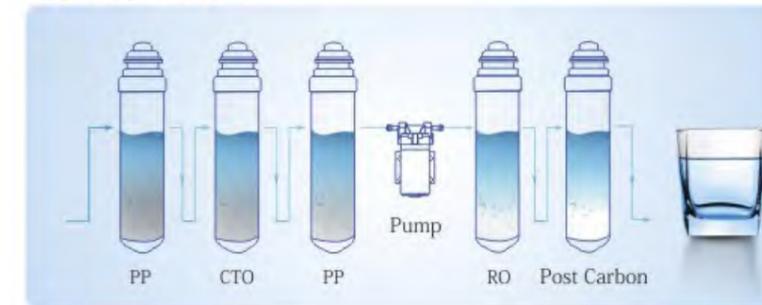

**KK-UF08**



### UF filtration

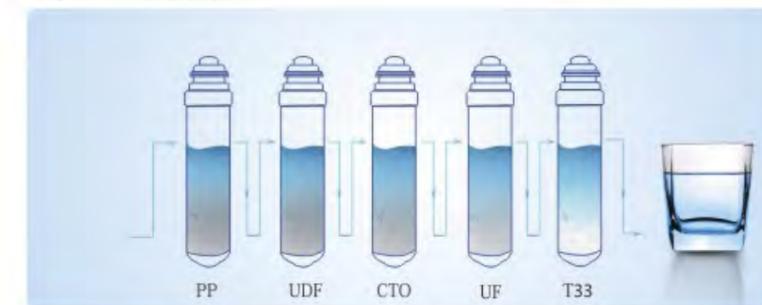

BOX RO SYSTEM WITH HEATING

BOX RO SYSTEM



**Model KK-RO50G-A (5 stage RO system)**  
Capacity: 50/75/100GPD Flush Type: Manual /Auto Flush  
Diaphragm Booster Pump with Adaptor 110/220V,50/60HZ  
RO Membrane: VONTRON or COPRITE Membrane  
Pressure Tank: 3.0G or 4G plastic Tank  
Unit packing Dimension: 41\*35\*58cm



**Model KK-RO50G-B (5 stage with computer)**  
Capacity: 50/75/100GPD Flush Type: Auto Flush  
Diaphragm Booster Pump with Adaptor 110/220V,50/60HZ  
RO Membrane: VONTRON or COPRITE Membrane  
Pressure Tank: 3.0G or 4G plastic Tank  
Unit packing Dimension: 41\*35\*58cm



**Model KK-RO50G-H (5 stage with Pressure gauge)**  
Capacity: 50/75/100GPD Flush Type: Manual /Auto Flush  
Diaphragm Booster Pump with Adaptor 110/220V,50/60HZ  
RO Membrane: VONTRON or COPRITE Membrane  
Pressure Tank: 3.0G or 4G plastic Tank  
Unit packing Dimension: 41\*35\*58cm



**Model KK-RO50G-03 (5 stage with cover)**  
Capacity: 50/75/100GPD Flush Type: Auto Flush  
Diaphragm Booster Pump with Adaptor 110/220V,50/60HZ  
RO Membrane: VONTRON or COPRITE Membrane  
Pressure Tank: 3.0G or 4G plastic Tank  
Unit packing Dimension: 41\*35\*58cm



**Model KK-RO50G-C (6 stage with UV)**  
Capacity: 50/75/100GPD Flush Type: Manual /Auto Flush  
Diaphragm Booster Pump with Adaptor 110/220V,50/60HZ  
RO Membrane: VONTRON or COPRITE Membrane  
Pressure Tank: 3.0G or 4G plastic Tank  
Unit packing Dimension: 41\*35\*58cm



**Model KK-RO50G-D (6 stage with T33-10)**  
Capacity: 50/75/100GPD Flush Type: Manual /Auto Flush  
Diaphragm Booster Pump with Adaptor 110/220V,50/60HZ  
RO Membrane: VONTRON or COPRITE Membrane  
Pressure Tank: 3.0G or 4G plastic Tank  
Unit packing Dimension: 41\*35\*58cm



**Model KK-RO50G-X (7 stage with UV & computer)**  
Capacity: 50/75/100GPD Flush Type: Auto Flush  
Diaphragm Booster Pump with Adaptor 110/220V,50/60HZ  
RO Membrane: VONTRON or COPRITE Membrane  
Pressure Tank: 3.0G or 4G plastic Tank  
Unit packing Dimension: 41\*35\*58cm



**Model KK-RO50G-02 (5 stage with cover)**  
Capacity: 50/75/100GPD Flush Type: Auto Flush  
Diaphragm Booster Pump with Adaptor 110/220V,50/60HZ  
RO Membrane: VONTRON or COPRITE Membrane  
Pressure Tank: 3.0G or 4G plastic Tank  
Unit packing Dimension: 41\*35\*58cm



**Model KK-RO50G-E (5 stage with cover)**  
Capacity: 50/75/100GPD Flush Type: Auto Flush  
Diaphragm Booster Pump with Adaptor 110/220V,50/60HZ  
RO Membrane: VONTRON or COPRITE Membrane  
Pressure Tank: 3.0G or 4G plastic Tank  
Unit packing Dimension: 41\*35\*58cm



**Model KK-RO50G-F (5 stage with cover)**  
Capacity: 50/75/100GPD Flush Type: Auto Flush  
Diaphragm Booster Pump with Adaptor 110/220V,50/60HZ  
RO Membrane: VONTRON or COPRITE Membrane  
Pressure Tank: 3.0G or 4G plastic Tank  
Unit packing Dimension: 41\*35\*58cm



**Model KK-RO50G-Z (5 stage Pressure gauge)**  
Capacity: 50/75/100GPD Flush Type: Manual /Auto Flush  
Diaphragm Booster Pump with Adaptor 110/220V,50/60HZ  
RO Membrane: VONTRON or COPRITE Membrane  
Pressure Tank: 3.0G or 4G plastic Tank  
Unit packing Dimension: 41\*35\*58cm



**Model KK-RO50G-04 (5 stage with cover)**  
Capacity: 50/75/100GPD Flush Type: Auto Flush  
Diaphragm Booster Pump with Adaptor 110/220V,50/60HZ  
RO Membrane: VONTRON or COPRITE Membrane  
Pressure Tank: 3.0G or 4G plastic Tank  
Unit packing Dimension: 41\*35\*58cm

# REVERSE OSMOSIS SYSTEM



**Model KK-RO-O (100-400GPD)**  
Diaphragm Booster Pump with Adaptor 110/220V,50/60HZ  
RO Membrane: VONTRON or COPRITE Membrane  
Pressure Tank: 11G Steel Tank  
Unit packing Dimension: 46\*27.5\*87cm  
Flush Type: Auto Flush



**Model KK-RO-N (100-200GPD)**  
Diaphragm Booster Pump with Adaptor 110/220V,50/60HZ  
RO Membrane: VONTRON or COPRITE Membrane  
Pressure Tank: 11G Steel Tank  
Unit packing Dimension: 46\*27.5\*87cm  
Flush Type: Auto Flush



**KK-S-5(20inch)**  
Single filtration,PP cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-D-6(20inch)**  
double filtration,PP+CTO cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-T-7(20inch)**  
three filtration,PP+CTO+GAC  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-T-8(Juboo 20inch)**  
three filtration,PP+CTO+GAC  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-D-8(Juboo 20inch)**  
double filtration,PP+CTO cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-D-12**  
10' big blue  
Double filtration,PP+CTO or  
depend on your require  
Inlet pressure:8-125PSI 0.6-8.8kg/m<sup>3</sup>

# WATER FILTERS



**KK-S-1**  
Single filtration,PP cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-S-2**  
Single filtration,PP cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-S-N**  
Single filtration,PP cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-S-6**  
Single filtration,PP cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-S-7**  
Single filtration,PP cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-D-1**  
Double filtration,PP+CTO cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-D-2**  
Double filtration,PP+CTO cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-D-9**  
Double filtration,PP+CTO cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-D-N**  
Double filtration,PP+CTO cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-T-1**  
Triple filtration,PP+GAC+CTO cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-T-2**  
Triple filtration,PP+GAC+CTO cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-T-9**  
Triple filtration,PP+GAC+CTO cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-T-N**  
Triple filtration,PP+GAC+CTO cartridge  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-D-5**  
Double filtration  
PP+CTO cartridge+UVlight  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-D-4-1**  
Double filtration,PP+CTO  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-D-4B**  
3 Stage filtration,PP +CTO+T33  
Inlet pressure:8-125PSI  
0.6-8.8kg/m<sup>3</sup>

WATER FILTERS

UF SYSTEM



**KK-T-4-A**

3 Stage filtration, PP+GAC+CTO  
Inlet pressure: 8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-T-5-A**

Triple filtration, PP+GAC+CTO+T33 cartridge  
Inlet pressure: 8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-T-101**

Triple filtration, PP+UDF+CTO+T33+T33  
Inlet pressure: 8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-T-102**

Triple filtration, PP+UDF+CTO+T33+UF  
Inlet pressure: 8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-T-103**

Triple filtration, PP+UDF+CTO+T33+UV  
Inlet pressure: 8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-T-6**

Triple filtration, PP+GAC+CTO cartridge  
Inlet pressure: 8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-T-12**

6Stage filtration, PP+GAC+CTO  
+T33+T33 +Mineral Filter  
Inlet pressure: 8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-S-8**

10" big blue  
Single filtration, PP cartridge  
Inlet pressure: 8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-D-11**

10" big blue  
Double filtration, PP+CTO or  
depend on your requirement  
Inlet pressure: 8-125PSI 0.6-8.8kg/m<sup>3</sup>



**KK-T-11**

10" big blue  
Triple filtration, PP+GAC+CTO or  
depend on your requirement  
Inlet pressure: 8-125PSI 0.6-8.8kg/m<sup>3</sup>



**KK-D-3**

Double filtration  
PP+CTO cartridge  
Inlet pressure: 8-125PSI  
0.6-8.8kg/m<sup>3</sup>



**KK-T-3**

Triple filtration  
PP+GAC+CTO cartridge  
Inlet pressure: 8-125PSI  
0.6-8.8kg/m<sup>3</sup>



Item No: KK-UF-1



Item No: KK-UF-2



Item No: KK-UF-3



Item No: KK-UF-4



Item No: KK-UF-5

- |                                |
|--------------------------------|
| 1. 5um PP Spun Filter          |
| 2. Granular Carbon Filter      |
| 3. Black Carbon Filter         |
| 4. UF Membrane                 |
| 5. Post Carbon or Power Filter |



# WATER FILTER HOUSING



Item number	Description	Material	Color	Cartridge	Size	Inlet&outlet port (NPT)
KKFS10-01W/C	Single "o" ring housing	PP	White/Clear	Depend on your requirement	10"	1/4"
KK-FS10-02W/C	Double "o" ring housing	PP	White/Clear	Depend on your requirement	10"	1/4"
KKFS10-08W	Single "o" ring housing,	PP	Blue	Depend on your requirement	10"	1/4"
KKFS10-10	Single "o" ring housing with air release button	AS	Clear	Depend on your requirement	10"	1/4"
KKFS10-12 KKFS10-14	Single "o" ring housing	AS	Clear	Depend on your requirement	10"	1/4"
KKFS10-19 KKFS10-21 KKFS10-22	In-line water filter housing with air release button	AS	Clear	Depend on your requirement	10"	1/2" 3/4" 1"
KKFS10-23	Single "o" ring housing	PP	Blue	Depend on your requirement	10"	1/2" 3/4" 1"
KKFS5-2 KKFS5-7	Single "o" ring housing	AS	Clear	Depend on your requirement	5"	1/2" 3/4"
KKFS10-B	Single "o" ring housing, with a air release button	PP	Blue	Depend on your requirement	10"	1/2" 3/4" 1"
KKFS20-01	In-line water filter housing with air release button	PP	Blue	Depend on your requirement	20"	3/4" 1"
KKFS20-02	Single "o" ring housing, with a air release button	PP	Blue	Depend on your requirement	20"	1/2" 3/4" 1"
KKFS20-03	Single "o" ring housing, with a air release button	AS	Clear	Depend on your requirement	20"	1/2" 3/4" 1"
KKFS20-04	Double "o" ring housing, with a air release button	AS	Clear	Depend on your requirement	20"	3/8" 1/2" 3/4" 1"

# WATER FILTER HOUSING



Max working pressure	Failure test pressure	Max sustained temperature	Note	Packing dimension
125 PSI	450 PSI	120F(50)	Waterflow and pressure loss depend on filter cartridge type Warning:don't expose filter housing to sunshine	47x36x32.5cm/12pcs
125 PSI	400 PSI	120F(50)	Waterflow and pressure loss depend on filter cartridge type Warning:don't expose filter housing to sunshine	47x36x32.5cm/12pcs
125 PSI	290 PSI	120F(50)	Waterflow and pressure loss depend on filter cartridge type Warning:don't expose filter housing to sunshine	47x36x32.5cm/12pcs
125 PSI	350 PSI	120F(50)	Waterflow and pressure loss depend on filter cartridge type Warning:don't expose filter housing to sunshine	47x36x32.5cm/12pcs
125 PSI	350 PSI	120F(50)	Waterflow and pressure loss depend on filter cartridge type Warning:don't expose filter housing to sunshine	47x36x32.5cm/12pcs
125 PSI	350 PSI	120F(50)	Waterflow and pressure loss depend on filter cartridge type Warning:don't expose filter housing to sunshine	62x44x29.5cm/12pcs
125 PSI	350 PSI	120F(50)	Waterflow and pressure loss depend on filter cartridge type Warning:don't expose filter housing to sunshine	62x44x29.5cm/12pcs
125 PSI	360 PSI	120F(50)	Waterflow and pressure loss depend on filter cartridge type Warning:don't expose filter housing to sunshine	66x43.5x42cm/12pcs
125 PSI	300x2 PSI 360x2 PSI	120F(50)	Waterflow and pressure loss depend on filter cartridge type Warning:don't expose filter housing to sunshine	62x44x29.5cm/6pcs 66x43.5x42cm/6pcs
125 PSI	2800 PSI	120F(50)	Waterflow and pressure loss depend on filter cartridge type Warning:don't expose filter housing to sunshine	62x44x29.5cm/50pcs
125 PSI	180 PSI	120F(50)	Waterflow and pressure loss depend on filter cartridge type Warning:don't expose filter housing to sunshine	39x39x40cm/4pcs
125 PSI	180 PSI	120F(50)	Waterflow and pressure loss depend on filter cartridge type Warning:don't expose filter housing to sunshine	40.5x40.5x73cm/4pcs
125 PSI	180 PSI	120F(50)	Waterflow and pressure loss depend on filter cartridge type Warning:don't expose filter housing to sunshine	39x39x73cm/4pcs
125 PSI	180 PSI	120F(50)	Waterflow and pressure loss depend on filter cartridge type Warning:don't expose filter housing to sunshine	39x39x73cm/4pcs
125 PSI	180 PSI	120F(50)	Waterflow and pressure loss depend on filter cartridge type Warning:don't expose filter housing to sunshine	39x39x73cm/4pcs

## TAP FILTER&SHOWER FILTER

The tap filter series filled with carbon fiber and granular carbon cartridge. It can be installed directly on the faucet. It includes a set of universal fittings for easy installing on any kinds of kitchen or bathroom faucet. This filter can remove chlorine, organic substances, taste and smell in the water.



KK-TF-01    KK-TF-02    KK-TF-03    KK-TF-04    KK-TF-05    KK-TF-06



KK-TF-07    KK-TF-08    KK-TF-09    KK-TF-10    KK-TF-11    PARTS  
F1    F2

The shower filter series filled with carbon fiber and granular carbon cartridge. It can be installed directly on the faucet. It includes a set of universal fittings for easy installing on any kinds of kitchen or bathroom faucet. This filter can remove chlorine, organic substances, taste and smell in the water.



## TAP FILTER&SHOWER FILTER



KK-TP-16A    KK-TP-16B    KK-TP-16C    KK-TP-16D    KK-TP-16E



Professional shower head



Water temperature control color, the color changes with the change in temperature

KK-TP-16F    KK-TP-16G    KK-TP-16H

## Shower Filter



The phosphate filter cartridge is made up of the phosphate and food grade housing. It can remove the water dirt and prevent iron. It is suitable for coffee maker, ice maker machine and washing machine.

# WATER FILTER CARTRIDGE



PP-10 PP-20 PP-10B PP-20B

PP-10	PP-20	PP-10B	PP-20B
H:10inch	H:20inch	H:10inch	H:20inch
ID:28mm	ID:28mm	ID:28mm	ID:28mm
OD:63mm	OD:63mm	OD:114mm	OD:114mm



PS-10 PS-10(hot) PS-20 PS-10B PS-20B

PS-10	PS-20	PS-10B	PS-20B
H:10inch	H:20inch	H:10inch	H:20inch
ID:28mm	ID:28mm	ID:28mm	ID:28mm
OD:63mm	OD:63mm	OD:114mm	OD:114mm



CPP-10 CPP-20 CPP-10B CPP-20B

CPP-10	CPP-20	CPP-10B	CPP-20B
H:10inch	H:20inch	H:10inch	H:20inch
ID:28mm	ID:28mm	ID:28mm	ID:28mm
OD:63mm	OD:63mm	OD:114mm	OD:114mm



PL-10 PL-20 PL-10B PL-20B

PL-10	PL-20	PL-10B	PL-20B
H:10inch	H:20inch	H:10inch	H:20inch
ID:28mm	ID:28mm	ID:28mm	ID:28mm
OD:63mm	OD:63mm	OD:114mm	OD:114mm

# WATER FILTER CARTRIDGE



CTO-10 CTO-20 CTO-10B CTO-20B CTO-102

CTO-10	H:10inch	ID:28mm	OD:71mm
CTO-20	H:20inch	ID:28mm	OD:71mm
CTO-10B	H:10inch	ID:28mm	OD:114mm
CTO-20B	H:20inch	ID:28mm	OD:114mm
CTO-102	H:10inch	ID:28mm	OD:71mm



PC-10 GAC-10 GAC-20 GAC-10B GAC-20B GAC-102

PC-10	H:10inch	ID:28mm	OD:63/71mm
GAC-10	H:10inch	ID:28mm	OD:71mm
GAC-20	H:20inch	ID:28mm	OD:71mm
GAC-10B	H:10inch	ID:28mm	OD:114mm
GAC-20B	H:20inch	ID:28mm	OD:114mm
GAC-102	H:10inch	ID:28mm	OD:71mm



Ceramic(B-A) Ceramic(B-B) Ceramic(A) Carbon Ceramic(B-A) Carbon Ceramic(B-B)

Ceramic (B-A)	H:10inch	ID:28mm	OD:48mm
Ceramic (B-B)	H:10inch	ID:28mm	OD:55mm
Ceramic (A)	H:10inch	ID:28mm	OD:48mm
Carbon Ceramic(B-A)	H:10inch	ID:28mm	OD:55mm
Carbon Ceramic(B-B)	H:10inch	ID:28mm	OD:68mm



PL-10A PL-10C

Pleated cartridge is made of various materials, such as: PP, PES, NYLON, and PVDF, this filter cartridge has high precision and is suitable for industry, medicine and portable water treatment.  
Filtration precision: 0.22, 0.45, 1, 5, 10 micron Length: 10, 20 inch Out diameter: 2.5, 4.5 inch



NT-10A (Stainless Net) NT-5A (Stainless Net) NT-10B (Plastic Net) NT-5B (Plastic Net)



## Filtration Medium



## Domestic UF cartridge

The UF cartridge is made of hollow fibre and the water filtration pore size less than 0.1 micron. It can remove the particles, organics, bacteria etc. It is easy to be installed and operated.



# QUICK FITTING

QUICK FITTING

QUICK FITTING

Quick adapter	Part-No.	Tube O.D.	Male elbow adapter	Part-No.	Tube O.D.	Thread	Stem/ping in elbow adapter	Part-No.	Tube O.D.	Thread	"L" shaped two open bender	Part-No.	Tube O.D.	Tube O.D.
	001-A	1/4		002-A	1/4	1/4		003-A	1/4	1/4		004-A	1/4	1/4
	001-B	3/8		002-B	1/4	1/2		003-B	1/4	3/8		004-B	1/4	3/8
	001-C	1/2		002-C	3/8	1/4		003-C	3/8	1/2		004-C	3/8	3/8
				002-D	3/8	3/8		003-D	3/8	3/8				
				002-E	3/8	1/2								

Male elbow adapter	Part-No.	Tube O.D.	Thread	— shaped two open connect	Part-No.	Tube O.D.	Tube O.D.	Male tee adapter	Part-No.	Tube O.D.	Tube O.D.	Thread	Male tee adapter	Part-No.	Tube O.D.	Tube O.D.	Thread
	005-A	1/4	3/8		006-A	1/4	1/4		007-A	1/4	1/4	1/4		008-A	1/4	1/4	1/4
	005-B	3/8	1/8		006-B	1/4	3/8		007-B	1/4	3/8	1/4		008-B	1/4	1/4	3/8
	005-C	3/8	1/2		006-C	3/8	3/8		007-C	1/4	1/4	1/4		008-C	1/4	1/4	3/8
									007-D	1/4	3/8	3/8		008-D	3/8	3/8	1/4
									007-E	3/8	3/8	3/8		008-E	3/8	3/8	3/8
									007-F	3/8	3/8	3/8		008-F	3/8	3/8	3/8

Union tee adapter	Part-No.	Tube O.D.	Tube O.D.	Tube O.D.	Stem/ping in tee adapter	Part-No.	Tube O.D.	Tube O.D.	Tube O.D.	Male straight adapter	Part-No.	Tube O.D.	Thread	Male straight adapter	Part-No.	Tube O.D.	Thread
	009-A	1/4	1/4	1/4		010-A	1/4	1/4	1/4		011-A	1/4	1/8		012-A	1/4	1/4
	009-B	1/4	1/4	3/8		010-B	1/4	1/4	3/8						012-B	1/4	3/8
	009-C	1/4	3/8	1/4		010-C	1/4	3/8	1/4						012-C	3/8	3/8
	009-D	1/4	3/8	3/8		010-D	3/8	3/8	3/8						012-D	3/8	1/4
	009-E	3/8	3/8	3/8		010-E	3/8	3/8	1/4								

Male elbow adapter	Part-No.	Tube O.D.	Thread	Bulk head adapter	Part-No.	Tube O.D.	Tube O.D.	Thread	Mnpt 90° ball valve	Part-No.	Tube O.D.	Stem O.D.	Lengthen adapter	Part-No.	Tube O.D.	Thread
	013-A	1/4	1/8		014-A	1/4	1/4	+16mm		015-A	1/4	1/4		015-BB	1/4	1/4
	013-B	3/8	1/8		014-B	1/4	3/8	+20mm		015-B	3/8	3/8				
					014-C	3/8	3/8	+22mm		015-E	1/4	3/4				

Stem/ping in tee adapter	Part-No.	Tube O.D.	Tube O.D.	Thread	Two way splitter	Part-No.	Tube O.D.	Tube O.D.	Tube O.D.	Elbow female adapter	Part-No.	Tube O.D.	Thread	Straight female adapter	Part-No.	Tube O.D.	Thread
	016-A	1/4	1/4	1/4		017-A	1/4	1/4	1/4		018-A	1/4	1/8		019-A	1/4	1/4
	016-B	1/4	1/4	3/8		017-B	3/8	3/8	3/8		018-B	1/4	1/4		019-B	3/8	1/4
	016-C	1/4	3/8	1/4		017-C	3/8	1/4	1/4						019-C	3/8	3/8
	016-D	3/8	3/8	3/8		017-D	1/4	3/8	3/8						019-D	1/4	7/16-24
	016-E	3/8	1/4	3/8													
	016-F	3/8	1/4	1/4													

Check valves adapter	Part-No.	Tube O.D.	Thread	Male straight adapter	Part-No.	Tube O.D.	Thread	Straight female adapter	Part-No.	Tube O.D.	Thread	Male straight adapter	Part-No.	Tube O.D.	Thread
	020-A	1/4	1/4		021-A	1/4	1/2		022-A	1/4	1/2		023-A	3/8	1/2
	020-B	1/4	1/8		021-B	1/4	3/8								
					021-C	3/8	3/8								

Straight female adapter	Part-No.	Tube O.D.	Thread	Hand valve	Part-No.	Tube O.D.	Tube O.D.	Straight female adapter	Part-No.	Tube O.D.	Thread	Stem attachment	Part-No.	Tube O.D.	Stem O.D.
	024-A	3/8	1/2		025-A	1/4	1/4		026-A	3/8	3/4		027-A	1/4	+10mm
					025-B	3/8	3/8		026-B	1/4	3/4				

# QUICK FITTING

Plug attachment	Part-No.	Tube O.D.	Stem O.D.	Bulk head adapter	Part-No.	Tube O.D.	Tube O.D.	Tube O.D.	Tube O.D.	Shut-off	Part-No.	Tube O.D.	Pressure	High pressure	Part-No.	Tube O.D.	Tube O.D.	Adjustable stroke scope of pressure
	028-A	1/4	φ 10mm		029-A	1/4	1/4	1/4	1/4		030-A	1/4×4	3Kg±0.2		031-A	1/4	1/4	2.0Kg±4.5Kg
					029-B	1/4	1/4	3/8	3/8									

Loss pressure	Part-No.	Tube O.D.	Tube O.D.	Stem O.D.	Check valves adapter	Part-No.	Tube O.D.	Tube O.D.	Hand valve	Part-No.	Tube O.D.	Thread	Restrictor	Part-No.	Tube O.D.	Tube O.D.
	032-A	1/4	1/4	≥0.3Kg		033-A	1/4	1/4		034-A	1/4	1/4		035-A	1/4	φ 40mm
										034-B	3/8	3/8				

Flow restrictor	Part-No.	Tube O.D.	Tube O.D.	Discharge	Stem/ping in elbow adapter	Part-No.	Tube O.D.	Stem O.D.	Fastener	Part-No.	Tube O.D.
	036-A	1/4	1/4	300CC		037-A	3/8	φ 8mm		038-A	1/4
	036-B	1/4	1/4	350CC						038-B	3/8
	036-C	1/4	1/4	400CC						038-C	1/2
	036-D	1/4	1/4	420CC							
	036-E	1/4	1/4	550CC							

Straight female adapter	Part-No.	Tube O.D.	Tube O.D.	Straight female adapter	Part-No.	Tube O.D.	Tube O.D.	Straight female adapter	Part-No.	Tube O.D.	Tube O.D.	Straight female adapter	Part-No.	Tube O.D.	Tube O.D.
	039-A	1/2	3/8		040-A	1/2	1/2		041-A	1/2	1/2		042-A	1/2	3/8

Straight female adapter	Part-No.	Tube O.D.	Thread	Straight female adapter	Part-No.	Tube O.D.	Thread	Straight female adapter	Part-No.	Tube O.D.	Thread
	043-A	1/2	1/2		044-A	1/2	5/16		CUT		

Stem/ping in elbow adapter	Part-No.	Thread	PE Tube	Stem/ping in elbow adapter	Part-No.	Thread	PE Tube	Stem/ping in elbow adapter	Part-No.	Thread	PE Tube	PE Tube	Stem/ping in elbow adapter	Part-No.	Thread	PE Tube	PE Tube
	4042	1/8	1/4		1044	1/4	1/4		7544	1/4	1/4	1/4		702	1/4	1/4	1/4
	4044	1/4	1/4											706	3/8	3/8	3/8
	4046	3/8	1/4														
	4064	1/4	3/8														
	4066	3/8	3/8														

Stem/ping in elbow adapter	Part-No.	Thread	Thread	Stem/ping in elbow adapter	Part-No.	Thread	PE Tube	PE Tube	Stem/ping in elbow adapter	Part-No.	PE Tube
	M22	1/4	1/4		6044	1/4	1/4	1/4		PIPE	1/4
	M44	1/2	1/2		6066	3/8	3/8	3/8		CORK	3/8
	M66	3/4	3/4								

# RO SYSTEM COMPONENT



WR-01 WR-03 WR-04 WR-05 WR-09 WR-10



BE-01 BE-02 BE-03 BE-04 BE-05 BE-06



BE-06S BE-07 BE-08 BE-09 BE-10 BE-12




PIPE CP-01 CP-02 CP-03 CP-04 CP-05 CP-06

(float Switch)



CP-07 01 02 03 3.2G/P 4.0G/P 3.2G/S 11G/S

# RO SYSTEM COMPONENT

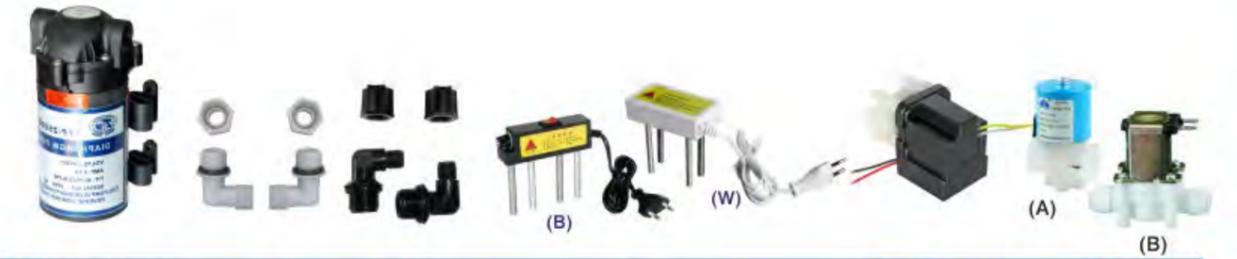

50/75/100/200/400 RO PUMP PF-W PF-B Water Electrolyzer Auto Flush Solenoid Valve Solenoid Valve



Tds Meter (01/02) Tds Meter (03) PH Pressure Meter

Flow Meter	GPM	LPM	LPH(可选)	螺纹	(kg)	工作压力	精度	温度℃
K-3000	0.03~0.35	0.1~1.4	10~100	G1/2"	0.4	≤0.6MPa	±5%	≤55
K-3001	0.2~2	1~7	50~500					
K-3002	0.5~5	1.8~18	120~1200					
K-3003	2~10	5~40	300~2400	G3/4"	0.6			
K-3004	2~16	10~60	500~3500					
K-3005	4~24	20~100	600~6000					
K-3006	5~35	30~130	1400~7000	G1"	0.7			

(A) (B) Transformer (1.2A/1.5A/2A/3A/4A)



CB-01 CB-02 CB-03 R.O PLC Conductivity Monitor




4040-1 SS membrane housing 4040-2 SS membrane housing 4021 membrane housing 8040SS membrane housing

## RO SYSTEM COMPONENT



## GOOSE NECK FAUCET

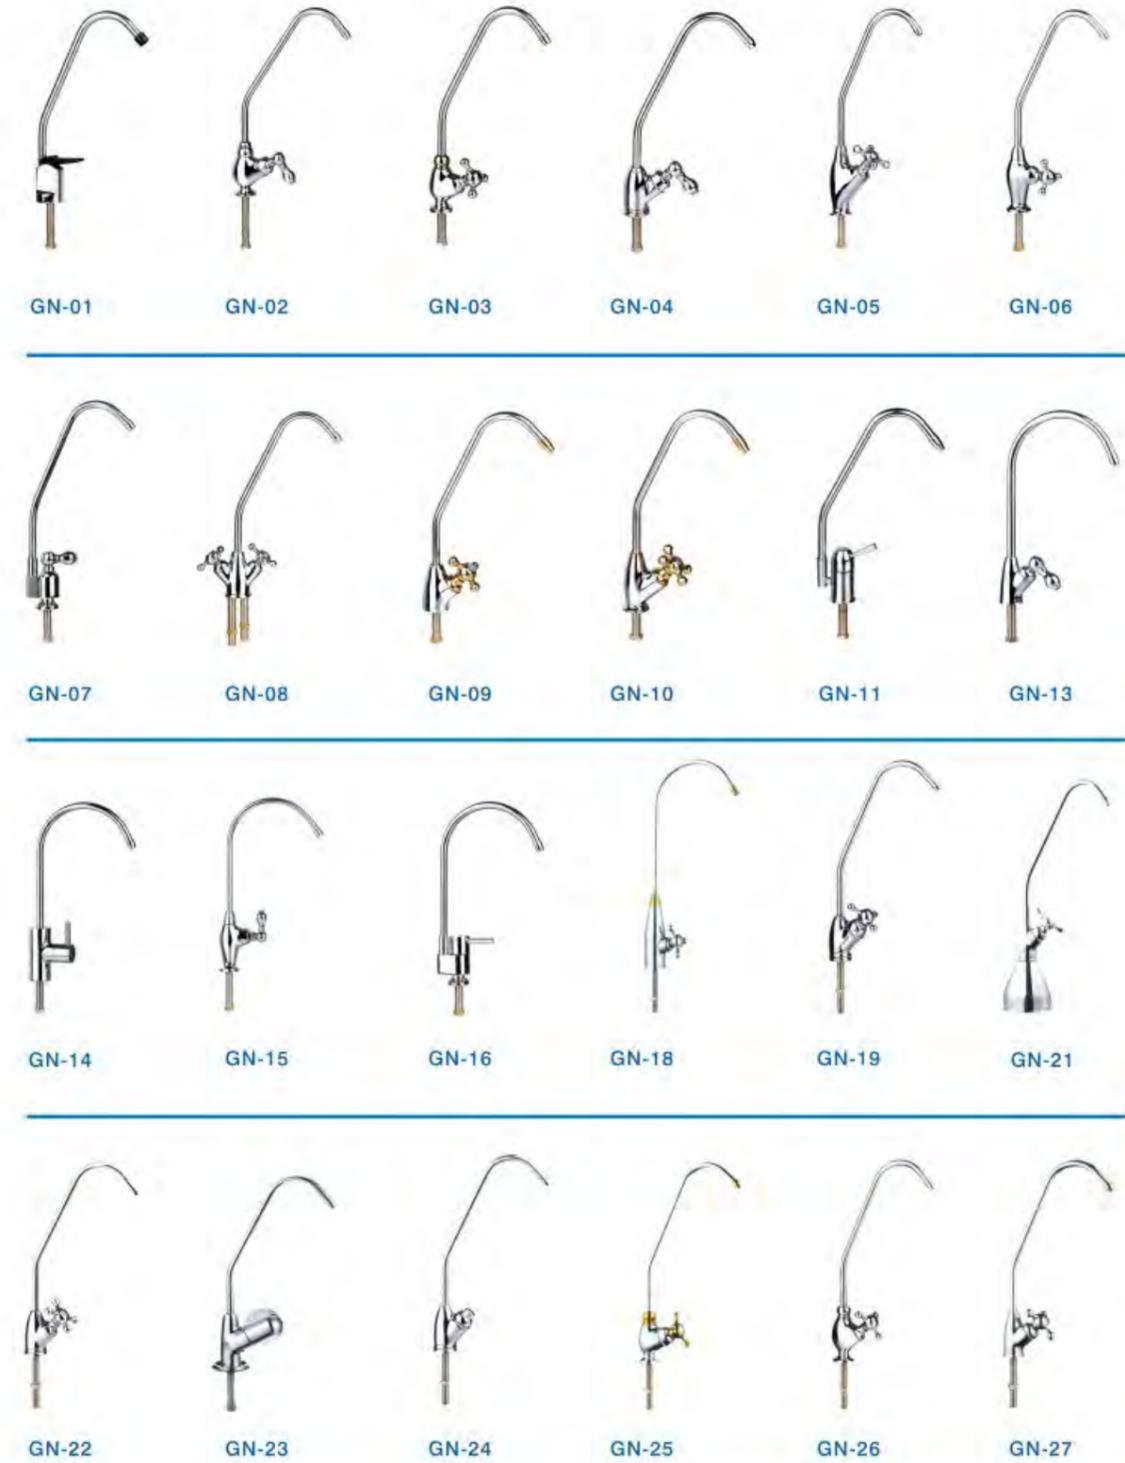

# WATER PURIFIER POT

WATER PURIFIER POT



GL-00(12L)



GL-01(14L)



GL-02(16L)



GL-11(19L)



GL-03(20L)



GL-05(22L)



GL-06(22L)



GL-07(24L)



GL-09(26L)



GL-08(28L)



GL-10(32L)



WATER TAP



CERAMIC FILTER



MINERAL STONE BOX



5/6-STAGE FILTER CARTRIDGE

# WATER PURIFIER POT

WATER PURIFIER POT



GP-01(12L)



GP-02(12L)



GP-03(13L)



F20(20L)



F22-A(22L)



F22-B(22L)



GP-06(16L)



GP-07(19L)



GP-08(21L)



WBS-03



(A)



(B)

WPP-10(13L)




WBS-01



WBS-02

## WATER PUMP&PURIFIER PITCHER

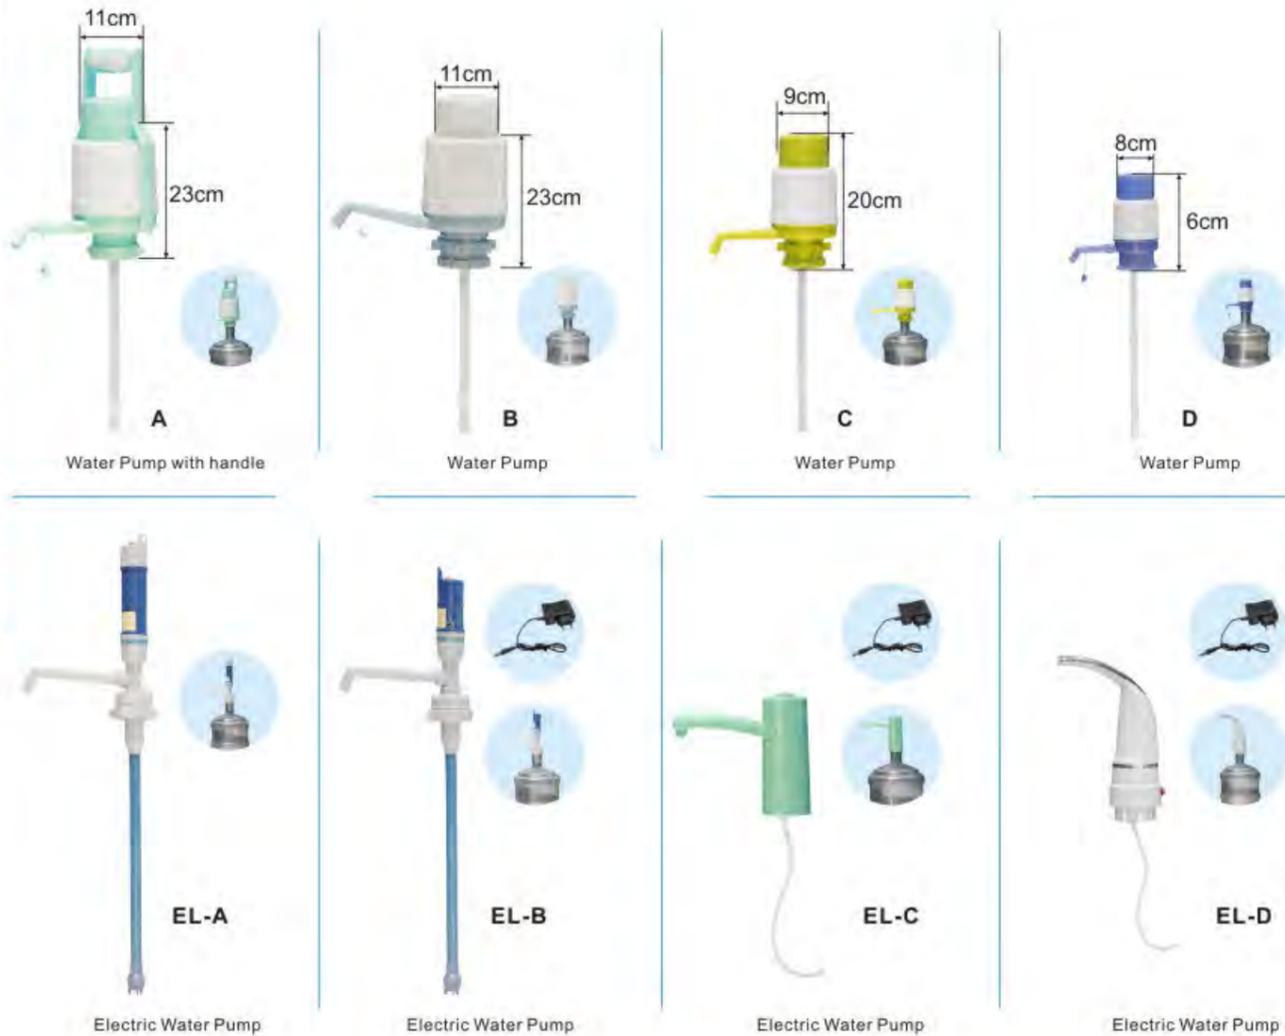

### Purifier Pitcher



KKBP100YA(2.5L/1.3L) KKBP100YB(2.5L/1.3L) KKBP100YC(2.5L/1.3L) KK-BZC6(2.5L/1.0L) KK-BDA3(3.5L/2.0L)

## ULTRAVIOLET STERILIZER



Specification of Ultraviolet Water Sterilizer Assembly							
Tye	UV4W	UV6W	UV12W	UV16W	UV25W	UV30W	UV55W
Pure water	0.056/h 0.25GPM	0.11/h 0.5GPM	0.22/h 1GPM	0.45/h 2GPM	1.36/h 6GPM	1.8/h 8GPM	2.88/h 12GPM
Tap water	0.044/h 0.25GPM	0.08/h 0.4GPM	0.017/h 0.8GPM	0.36/h 1.6GPM	1.0/h 4.8GPM	1.45/h 6.4GPM	2.5/h 9.6GPM
Lamp rated life(hrs)	8000	8000	8000	8000	8000	8000	8000
UV dosage (uW-sec/cm <sup>2</sup> )	>30000	>30000	>30000	>30000	>30000	>30000	>30000
Volts	110-130 200-240						
Electricity unit	Hz	50/60	50/60	50/60	50/60	50/60	50/60
Wats	4W						
Lamp failure	LED						
Overall dimension(mm)	φ51X200	φ51X260	φ51X320	φ63X350	φ63X520	φ63X970	φ63X970
Shell material(stainless)	304#	304#	304#	304#	304#	304#	304#
Inlet/outlet size(inch)	1/4"	1/4"	1/4"	1/4"	1/2"	3/4"	3/4"

## STAINLESS STEEL WATER PURIFIER



KK-SC1-02



KK-SA1



KK-SA2



KK-SA3



KK-SC1-01




KK-SB1



KK-SB2



KK-SB3




KK-SS-6(20inch)



KK-SS-7(20inch)



KK-SD-5(20inch)



KK-ST-4(20inch)



KK-SD-6



KK-ST-5



KK-SC1-03



KK-SC1-05



KK-SC1-04



KK-Q3-1



KK-TQ



KK-US10-4



KK-RO-01


## STAINLESS STEEL UF PURIFIER



KK-GB500  
φ101×335



KK-GB1000  
φ101×500



KK-UF-2500  
φ148×860



KK-UF-2T  
φ148×730

Description	Package Dimension	Pieces/Box	(L/H)	Filter Cartridge	Connector Type	Dimension
KK-GB500	42X38X63	6	500	UF	1/2"	φ101X335
KK-GB1000	53X42X43	4	1500	UF	1/2"	φ101X500
KK-GB1500	72X42X43	4	2000	UF	1/2"	φ101X705
KK-GB2000	83X42X43	4	2500	UF	3/4"	φ108X768
KK-GB500(N)	44X42X40	4	500	UF	1/2"	φ114X365
KK-GB1000(N)	53.5X42X40	4	1500	UF	1/2"	φ114X455
KK-GB2000(N)	75X42X42	4	2000	UF	3/4"	φ114X665
KK-GB2500(N)	89X42X42	4	2500	UF	3/4"	φ114X800

STAINLESS STEEL WATER PURIFIER

STAINLESS STEEL UF PURIFIER

# WATER DISTRIBUTOR SERIES



KK-101 KK-102 KK-103 KK-104 KK-105 KK-106 KK-107A KK-107B



KK-108 KK-201 KK-202 KK-224

Item number	Diameter(inches/mm)	Flow	Material
KK-107A	10" ~20" (φ250-φ500mm)	6m <sup>3</sup> /h	/
KK-107B	8" ~16" (φ200-φ400mm)	2m <sup>3</sup> /h	/
KK-108	10" ~18" (φ250-φ450mm)	/	/
KK-201	/	1T/H	PP
KK-202	/	0.5T/H	ABS
KK-224	/	1T/H	PP

Item number	Diameter(inches/mm)	Item number	Diameter(inches/mm)	Item number	Diameter(inches/mm)
KK-101	6" ~16" (φ150-φ400mm)	KK-103	6" ~16" (φ150-φ400mm)	KK-105	16" ~36" (φ400-φ900mm)
KK-102	6" ~16" (φ150-φ400mm)	KK-104	6" ~16" (φ150-φ400mm)	KK-106	16" ~24" (φ400-φ600mm)



KK-203 KK-204 KK-205 KK-206 KK-207 KK-208 KK-211 KK-213



KK-209 KK-210 KK-222 KK-223




KK-212 KK-214 KK-219



KK-226 KK-232 KK-233

Item number	Description	Diameter(inches/mm)
KK-203	3/4" top distributor	6" ~12" (φ150-φ300mm)
KK-204	3/4" bottom distributor	6" ~12" (φ150-φ300mm)
KK-205	1" top distributor	6" ~16" (φ150-φ400mm)
KK-206	1" bottom distributor	6" ~16" (φ150-φ400mm)
KK-207	Autotrol top distributor	6" ~12" (φ150-φ300mm)
KK-208	Autotrol bottom distributor	6" ~12" (φ150-φ300mm)
KK-209	3/4" 1" Fleck top distributor	6" ~12" (φ150-φ300mm)
KK-210	Fleck bottom distributor	6" ~12" (φ150-φ300mm)
KK-222	3/4" top distributor	6" ~12" (φ150-φ300mm)
KK-223	3/4" bottom distributor	6" ~12" (φ150-φ300mm)
KK-211	3/4" top distributor	6" ~12" (φ150-φ300mm)
KK-213	3/4" bottom distributor	6" ~12" (φ150-φ300mm)
KK-212	1" top distributor	8" ~16" (φ200-φ400mm)
KK-214	1" bottom distributor	8" ~16" (φ200-φ400mm)
KK-219	/	/
KK-226	/	/
KK-232	3/4" top distributor	6" ~16" (φ150-φ400mm)
KK-233	3/4" bottom distributor	6" ~16" (φ150-φ400mm)

# WATER DISTRIBUTOR SERIES

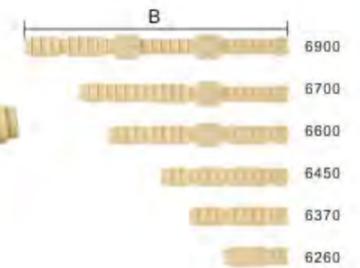

Item number	Discription(mm)				Diameter(inches/mm)	Top opening
	A	B	C	D		
KK-6260	260	82	35	50/42	12" ~16" (φ300-φ400mm)	4" ~8" THREAD
KK-6370	370	136	35	50/42	18" ~21" (φ450-φ550mm)	4" ~8" THREAD
KK-6450	460	182	35	50/42	24" (φ600mm)	4" ~8" THREAD
KK-6600	620	260	35	50/42	30" (φ750mm)	4" ~8" THREAD
KK-6700	710	305	35	50/42	36" (φ900mm)	4" ~8" THREAD
KK-6900	866	383	35	50/42	40" (φ1000mm)	4" ~8" THREAD

Item number	Discription(mm)					Diameter(inches/mm)	Top opening
	A	B	C	D	Slot size		
KK-326	710	330	53	63	0.25/0.4mm	36" ~40" (φ900-φ1000mm)	4" ~8" THREAD
KK-327	930	410	53	63	0.25/0.4mm	48" ~60" (φ1200-φ1500mm)	4" ~8" THREAD
KK-328	710	330	53	63	0.25/0.4mm	36" ~40" (φ900-φ1000mm)	4" ~8" THREAD
KK-329	930	410	53	63	0.25/0.4mm	48" ~60" (φ1200-φ1500mm)	4" ~8" THREAD

Item number	Discription(mm)			Diameter(inches/mm)	Top opening
	A	B	C		
KK-311	180	400	88	30" (φ750mm)	4" ~8" THREAD
KK-312	242	472	88	36" ~40" (φ750-φ1000mm)	4" ~8" THREAD
KK-313	310	540	88	48" ~60" (φ900-φ1000mm)	4" ~8" THREAD

• Description: Multi-port Valve (Manual Filter Valve)



KK-F52



KK-F56A



KK-F56D1



KK-F56D2

• Description: Multi-function Flow Control Valve (Manual Softener Valve)



KK-F64A1



KK-F64A2



KK-F64B-C



KK-F64D

• Description: Multi-functional Flow Control Valve (Automatic Softener Valve)



KK-F67B



KK-F74A



KK-F63B3



KK-F65B

• Description: Multi-functional Flow Control Valve (Automatic Filter Valve) and Distributors



KK-F68A3



KK-F75A



KK-F65G3



KK-F63I3



- The FRP pressure vessels are made up of high performance composite material and filament winding . It is of 100% corrosion resistant and uses the various thermoplastic liners of olyester , high strength polypropene etc. The pressure vessel is more strength than the stainless steel vessel , while the weight is only 1/3 of the stainless steel vessel of same size.
- Operating pressure : 150psi
- Operating temperature : 150F
- Cycle test : 250,000 times from 10psi to 150psi
- Qualification burst test : 500psi

NO.	Size		A Dianeter		B Height Without Base		C Height With Base		Top Open	Bottom Open	Capacity		Operating pressure		Filtration velocity
	(In)	(mm)	(In)	(mm)	(In)	(mm)	(In)	(mm)			Gallons	Liters	MPa	BAR	
1	07x24	170x610	7.0	181	24.0	610	25.4	645	2.5" NPSM	/	3.8	15	/	/	0.2-0.3
2	07x24	170x610	7.0	181	35.0	890	36.4	925	2.5" NPSM	/	5.2	19.7	/	/	0.2-0.4
3	08x17	200x430	8.0	206	17.0	430	18.1	460	2.5" NPSM	/	3.1	11.7	/	/	0.2-0.5
4	08x20	200x470	8.0	206	19.0	470	19.5	495	2.5" NPSM	/	3.5	13.4	/	/	0.1-0.3
5	08x35	200x890	8.0	206	35.0	890	36.2	920	2.5" NPSM	/	6.6	25.0	/	/	0.1-0.3
6	08x44	200x1115	8.0	206	43.9	1115	44.9	1140	2.5" NPSM	/	8.7	32.9	/	/	0.2-0.5
7	09x35	220x890	9.0	232	35.0	890	35.8	910	2.5" NPSM	/	8.3	31.4	/	/	0.2-0.5
8	09x40	220x1005	9.0	232	40.0	1005	40.4	1025	2.5" NPSM	/	9.5	36.0	/	/	0.2-0.5
9	09x42	220x1074	9.0	232	42.28	1074	43.03	1093	2.5" NPSM	/	10.09	38.2	/	/	0.2-0.5
10	09x48	220x1215	9.0	232	48.0	1215	48.4	1230	2.5" NPSM	/	12.7	48.0	/	/	0.3-0.6
11	10x17	240x430	10.0	257	17.0	430	18.1	460	2.5" NPSM	/	4.8	18.2	/	/	0.2-0.4
12	10x35	240x890	10.0	257	35.0	890	36.0	915	2.5" NPSM	/	10.2	38.6	/	/	0.5-1.0
13	10x44	240x1115	10.0	257	43.9	1115	45.1	1145	2.5" NPSM	/	13.1	49.6	/	/	0.5-1.4
14	10x54	240x1370	10.0	257	54.1	1375	55.3	1405	2.5" NPSM	/	16.4	62.0	/	/	0.6-1.5
15	12x48	300x1215	12.0	308	48.0	1215	48.4	1225	2.5" NPSM	/	20.6	78.0	/	/	1.6-2.0
16	12x52	300x1320	12.0	308	52.0	1320	53.3	1355	2.5" NPSM	/	22.2	84.0	/	/	1.6-2.2
17	12x52	300x1320	12.0	308	52.0	1320	52.2	1325	4.5" BUTTRESS	/	22.2	84.0	/	/	1.6-2.2
18	12x65	300x1320	12.0	308	52.0	1320	65.9	1675	2.5" NPSM	/	22.6	112.0	/	/	1.8-2.4
19	13x54	330x1370	13.0	334	54.0	1370	55.3	1405	2.5" NPSM	/	27.5	104.0	/	/	2.0-2.5
20	14x65	350x1620	14.0	360	63.8	1620	65.6	1665	2.5" NPSM	/	40.6	154.0	/	/	2.5-3.0
21	14x65	350x1620	14.0	360	63.8	1620	65.6	1665	4" UN	/	40.6	154.0	/	/	2.5-3.0
22	14x65	400x1620	16.0	410	63.8	1620	64.6	1640	2.5" NPSM	/	49.0	185.0	/	/	3.2-4.5
23	14x65	400x1620	16.0	410	63.8	1620	64.6	1640	4" UN	/	49.0	185.0	/	/	3.2-4.5
24	18x65	450x1620	18.0	460	63.8	1620	72.8	1850	4" UN	/	66.7	251.8	/	/	3.5-4.8
25	18x65	450x1650	18.5	470	65.6	1665	72.8	1850	4" UN	none 6" FLG	66.8	253.0	1.0	10	3.5-4.8
26	16x72	400x1800	16.0	410	70.9	1800	72.8	1850	2.5" NPSM	none	53.6	203.0	1.0	10	3.5-4.6
27	18x72	400x1800	16.0	410	70.9	1800	72.8	1850	4" UN	none	53.6	203.0	1.0	10	3.3-4.6
28	20x72	500x1800	20.5	520	70.9	1800	78.0	1980	4" UN	none 6" FLG	89.0	337.0	1.0	10	4.1-5.6
29	21x62	530x1600	21.7	550	63.0	1600	71.1	1842	4" UN	none 6" FLG	88.0	333.0	1.0	10	4.0-5.5
30	24x72	600x1800	24.4	620	70.9	1800	79.9	2030	4" UN	6" FLG	126.8	480.0	1.0	10	6.2-8.2
31	30x72	750x1800	30.5	775	70.9	1800	79.5	2020	4" UN	6" FLG	195.5	740.0	1.0	10	7.2-12.2
32	36x72	900x1800	36.4	925	70.9	1800	82.3	2090	4" UN	6" FLG	283.0	1071	1.0	10	13.2-16.2

# WATER DISPENSER TAP

WATER DISPENSER TAP



# WATER DISPENSER TAP

WATER DISPENSER TAP

