



引领行业 走向全球
LEADING THE INDUSTRY TO THE WORLD



山东中聚电器有限公司

Shandong Zhongju Electric Appliance Co., Ltd.

地址：山东省国家级临沂经济技术开发区沃尔沃路与柳工路交汇处

Address: Linyi economic and technological development zone in shandong province Volvo road and liugong road intersection.

业务一部：Tel: 0086-539-8896777 8896888 Fax: 0086-539-6012396

业务二部：Tel: 0086-539-8889777 8889888 Fax: 0086-539-5559666

<http://www.cnboshi.cn>

E-mail: cnboshi@163.com

山东中聚电器有限公司

Shandong Zhongju Electric Appliance Co., Ltd.

中国 临沂 Linyi, China

关于我们 ABOUT US

山东中聚电器有限公司是一家科技型企业，主要从事研发、生产、推广、销售：农业机械、园林机械、清洗机械、微电机、净水泵、复合材料制品及附属配件、货物及技术进出口。

公司现有员工300余人，现有塑料成型加工设备56台套，微型直流电机专用生产设备76台套，装配流水线20条，具有年产直流电机、隔膜泵1000万台的能力。

公司以市场需求为导向，以客户满意为标准，为客户提供卓越产品。目前公司生产的“MUDEBI”、“星太郎”牌隔膜泵品质处于国际领先水平，主要出口欧美和日本等国家。产品具有压力高、流量大、低噪音、低电流、无渗漏、易于控制等特点。“雨露”牌隔膜泵在国内更是家喻户晓，多年来一直以性能可靠、质量稳定而著称，被许多国内外知名品牌公司作为免检产品使用，市场占有率逐年攀升，企业品牌价值快速增长。

展望未来，公司将以“更专业、更专注、更和谐”的企业文化和发展理念与海内外客户一道共同稳健成长，努力实现公司的发展愿景，逐步把企业打造成更具创造力和影响力的新型企业。

Shandong Zhongju Electric Appliance Co., Ltd. is a scientific and technological enterprise, which mainly engaged in research ,development, production, sales: agricultural machinery, garden machinery, washing machinery, micro motor, water purification pump, composite materials and accessories, goods and technology import and export.



The company now has more than 300 workers. There are 56 sets of plastic processing equipment ,76 sets of micro DC motor dedicated production equipment, 20 assembly lines. Company annual comprehensive production capacity achieves 10 million sets of direct current motors and diaphragm pumps.


The company always adheres to the following principals: take the market demand as the guidance and the satisfaction as the standard, make efforts to provide customers with excellent products! The main production “MUDEBI”、“XITAILANG” brand series pumps all meet or exceed national standards, and there are exported to all over the world, such as America, Europe and Japan. The high technological pumps are qualified with high pressure, large flow, low noise, low current, no leakage and easy to control. The famous brand “Rain & Dew” Pump is well known all over the country, for its reliable performance, stable quality. Pump are used as exemption products by many famous enterprise at home and abroad!



中聚电器第一工业园




BS2050G常规增压泵

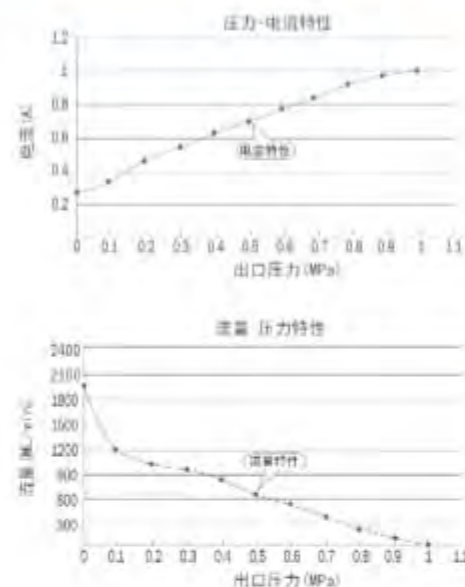

25%

安装尺寸 Mounting Dimensions(mm)

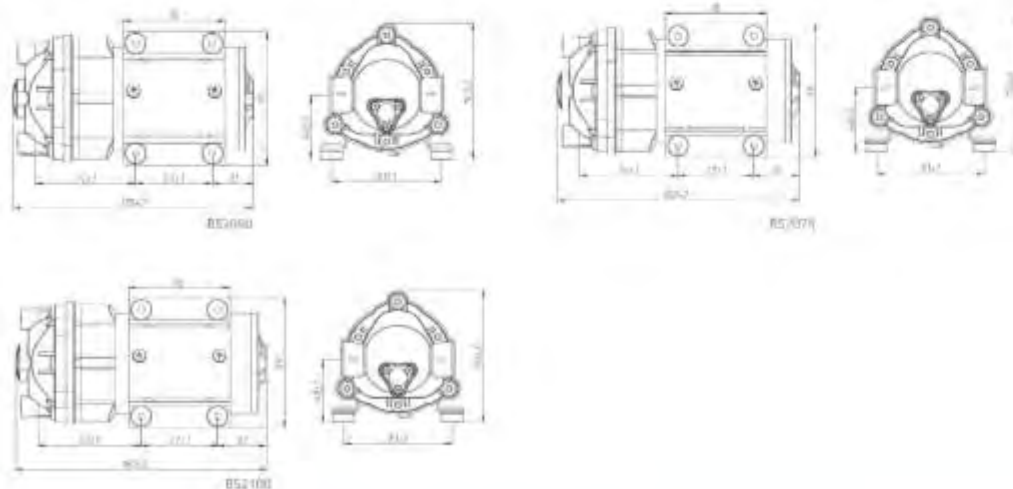

恒压增压泵系列

产品特点 Product features


- 符合RoHS, CE最新认证
- 过流部件FDA食品级要求
- 所有承压部件纯金属制造
- 密封部件纯进口材质
- 电气、密封、通量性能全程全检
- 强劲、恒定的出水压力
- In accordance with RoHS/CE certification latest
- Over-current components of the FDA food grade requirements
- All pressure parts pure metal manufacturing
- Sealing parts pure imported materials
- Electrical, seal, the performance of flux to the full inspection
- Strong and constant water pressure




产品参数 Product parameters

型号 Model	RS050W	RS075W	RS110W	RS155W	RS200W	RS240W	RS260W	RS400W
电压 Voltage	4VDC	4VDC	4VDC	4VDC	4VDC	4VDC	4VDC	4VDC
进出口口径 Connection	2-8TAP	2-8TAP	2-8TAP	2-8TAP	2-8TAP	2-8TAP	2-8TAP	2-8TAP
进水压力 Min. pressure	0.2MPa	0.2MPa	0.2MPa	0.2MPa	0.2MPa	0.2MPa	0.2MPa	0.2MPa
工作压力 Operating pressure	0.5MPa	0.5MPa	0.5MPa	0.5MPa	0.5MPa	0.5MPa	0.5MPa	0.5MPa
工作电流 Current	0.07A	0.08A	0.13A	0.18A	0.18A	0.22A	0.23A	0.36A
工作功率 Work power	0.003W/min	0.003W/min	0.003W/min	0.003W/min	0.003W/min	0.003W/min	0.003W/min	0.003W/min
开放流量 Open flow	3000L/min	3500L/min	4000L/min	4500L/min	4500L/min	4500L/min	5000L/min	4000L/min
最大压力 Max. pressure	0.80-0.95MPa	0.80-0.95MPa	0.80-0.95MPa	0.80-0.95MPa	0.80-0.95MPa	0.80-0.95MPa	0.80-0.95MPa	0.80-0.95MPa
最大电流 Max current	0.15A	0.15A	0.14A	0.15A	0.15A	0.15A	0.15A	0.15A

BS2075W恒压增压泵

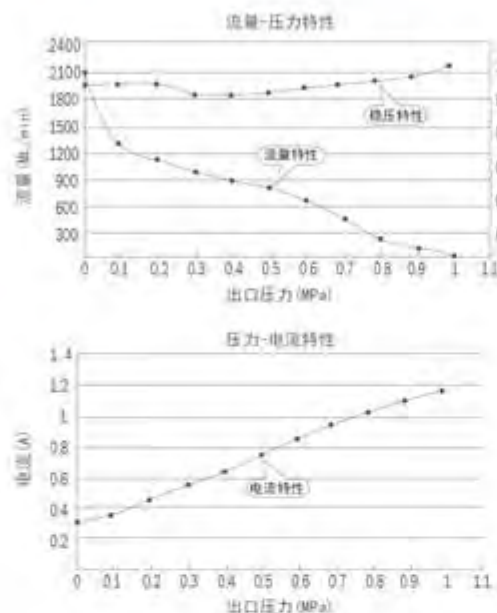

安装尺寸 Mounting Dimensions(mm)

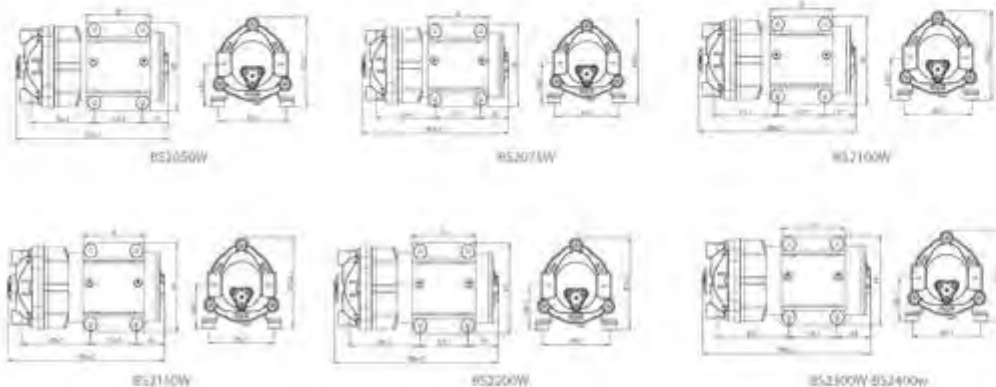

自吸增压泵系列

产品特点 Product features


- 符合RoHS, CE最新认证
- 过流部件FDA食品级要求
- 所有承压部件纯金属制造
- 密封部件纯进口材质
- 电气、密封、通量性能全程全检
- 恒压自吸一体式设计
- In accordance with RoHS&CE certification latest
- Over-current components of the FDA food grade requirements
- All pressure parts pure metal manufacturing
- Sealing parts pure imported materials
- Electrical, seal, the performance of flux to the full inspection
- Constant pressure self priming one piece design



产品参数 Product parameters


型号 Model	BS2050S	BS2075S	BS2100S	BS2150S	BS2200S
电压 Voltage	24VDC	24VDC	24VDC	24VDC	24VDC
进出口螺纹 Connection	3/8"NPT	3/8"NPT	3/8"NPT	3/8"NPT	3/8"NPT
进水压力 Inlet pressure	0MPa	0MPa	0MPa	0MPa	0MPa
工作压力 Operating pressure	0.8MPa	0.8MPa	0.8MPa	0.8MPa	0.8MPa
工作电流 Current	1.1A	1.2A	1.5A	2.0A	2.4A
开放流量 Open flow	>850ml/min	>850ml/min	>1000ml/min	>1500ml/min	>1850ml/min
自吸强度 Intensity of inhibition	>1200ml/min	>1400ml/min	>1500ml/min	>1800ml/min	>2500ml/min
最大压力 Max pressure	0.8-1.0MPa	0.8-1.0MPa	0.8-1.0MPa	0.8-1.0MPa	0.8-1.0MPa
最大电流 Max current	1.45A	1.70A	2.00A	2.70A	3.20A

BS2100S自吸增压泵

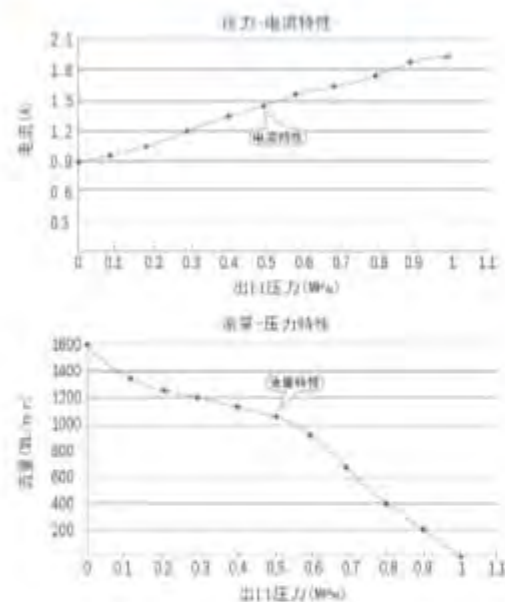

25%


安装尺寸 Mounting Dimensions(mm)

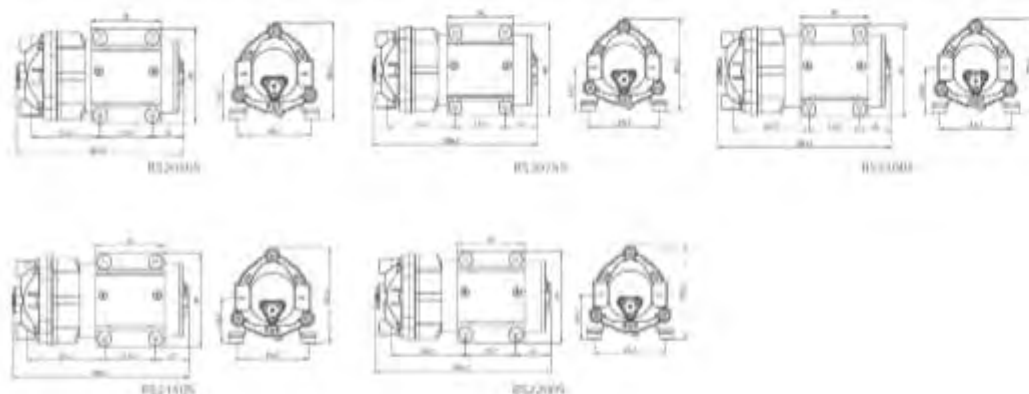

节能增压泵系列




安装尺寸 Mounting Dimensions(mm)

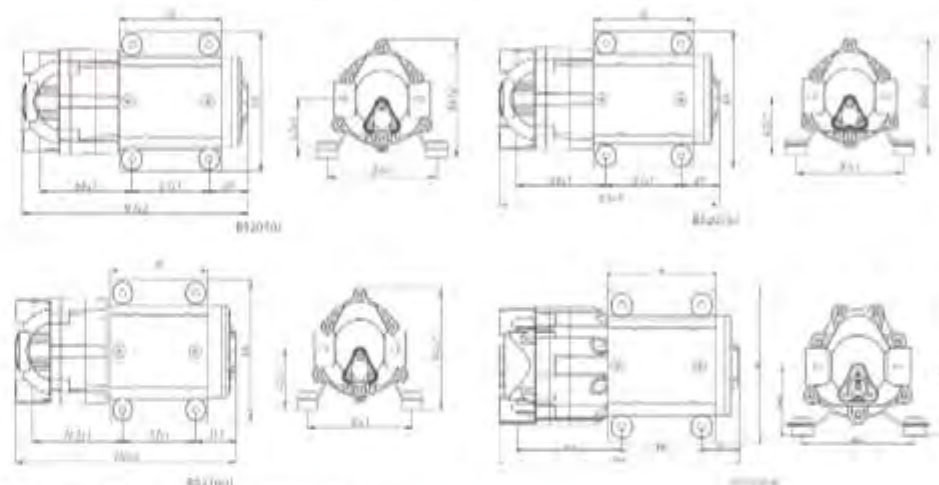

产品参数 Product parameters

型号 Model	BS2075S	BS2100S	BS2150S
电压 Voltage	24VDC	24VDC	24VDC
进出口口径 Connection	1/2" G1/2"	1/2" G1/2"	1/2" G1/2"
供水压力 Inlet pressure	0.2MPa	0.2MPa	0.2MPa
工作压力 Operating pressure	0.5MPa	0.5MPa	0.5MPa
工作电流 Current	≤0.7A	≤0.8A	≤1.0A
工作流量 Work flow	2000L/min	2000L/min	2000L/min
开放流量 Open flow	3000L/min	3000L/min	3000L/min
最大压力 Max pressure	0.8-1.0MPa	0.8-1.0MPa	0.8-1.0MPa
最大电流 Max current	≤1.0A	≤1.2A	≤1.4A


BS2050M自吸增压泵

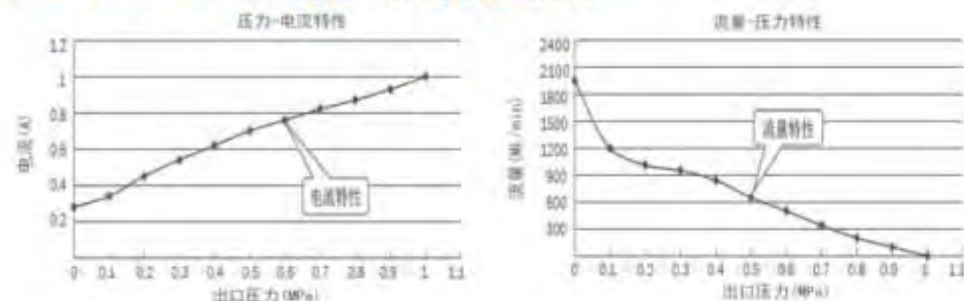

产品参数 Product parameters

型号 Model	BS2050M	BS2050PM	BS2050SM
电压 Voltage	24VDC	24VDC	24VDC
进出口口径 Connection	3/8" NPT	1/2" NPT	1/2" NPT
进水压力 Inlet pressure	0.2MPa	0.2MPa	0.2MPa
工作压力 Operating pressure	0.5MPa	0.5MPa	0.5MPa
工作电流 Current	≤0.7A	≤0.9A	≤1.1A
工作流量 Work flow	≤1000ml/min	≤1000ml/min	≤1000ml/min
开扬流量 Open flow	1000ml/min	1000ml/min	1000ml/min
最大压力 Max pressure	0.5MPa 0.5MPa	0.5MPa 0.5MPa	0.5MPa 0.5MPa
最大电流 Max current	≤1.0A	≤1.1A	≤1.2A

安装尺寸 Mounting Dimensions(mm)

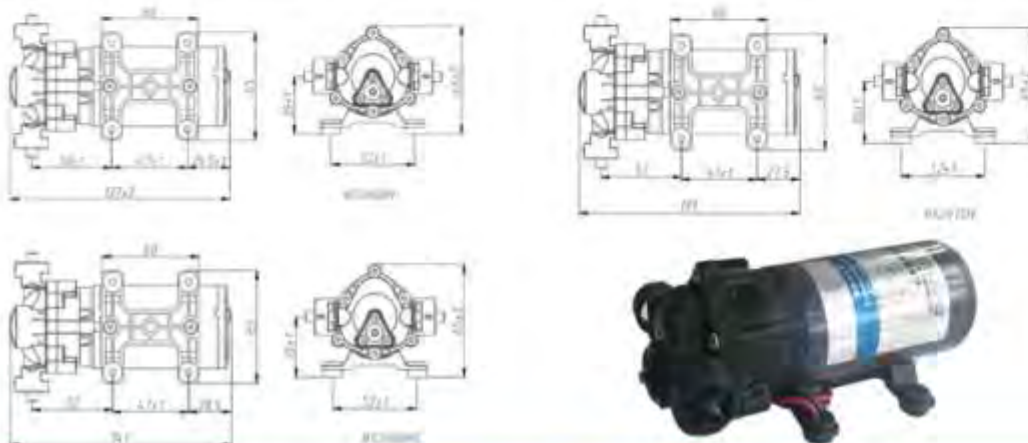

纳滤超滤增压泵系列

产品特点 Product features

- 符合RoHS、CE最新认证
- 低压大流量
- 小体积、高效率设计
- 智能断电、断水设计
- 电气、密封、通量性能全程全检
- 恒压自吸一体式设计
- In accordance with RoHS/CE certification latest
- Low pressure and large flow
- Small size, high efficiency design
- Intelligent power cut and water cut design
- Electrical, seal, the performance of flow to the full inspection
- Constant pressure self-priming one-piece design



BS2000SNC系列

产品参数 Product parameters

型号 Model	BS2050SNC(50-100)	BS2150SNC(150-200)	BS2300SNC(300-400)
电压 Voltage	24VDC	24VDC	24VDC
进出口口径 Connection	3/8" NPT (1/2")	3/8" NPT (1/2")	3/8" NPT (1/2")
进水压力 Inlet pressure	0.2MPa	0.2MPa	0.2MPa
工作压力 Operating pressure	0.5MPa	0.5MPa	0.5MPa
工作电流 Current	≤0.7A	≤0.9A	≤1.1A
工作流量 Work flow	≤1000ml/min	≤1200ml/min	≤2200ml/min
开扬流量 Open flow	≥1300ml/min	≥2000ml/min	≥3000ml/min
最大压力 Max pressure	0.45-0.5MPa	0.45-0.5MPa	0.45-0.5MPa
最大电流 Max current	≤1.0A	≤1.1A	≤1.2A



鲁博士

自吸供水超滤纳滤专用泵

市政管道压力
解决无水压
水压不足供水
智能开关自动启停

产品图片	规格型号	工作电流	最大电流	工作流量	堵转压力
	BS2075SNC (50—100)	$\leq 0.7A$	$\leq 1.0A$	≥ 800 ml/min	0.45—0.5 MPa
	BS2150SNC (150—200)	$\leq 0.9A$	$\leq 1.4A$	≥ 1200 ml/min	0.45—0.5 MPa
	BS2300SNC (300—400)	$\leq 1.4A$	$\leq 2.0A$	≥ 2200 ml/min	0.45—0.5 MPa

鲁博士

自吸供水超滤纳滤RO专用泵



市政管道压力
解决无水压
水压不足供水
智能开关自动启停
可调节



产品图片	规格型号	工作电流	最大电流	工作流量	堵转压力
	BS2075SNC (50—100)	$\leq 0.7A$	$\leq 1.0A$	≥ 800 ml/min	0.45—0.5 MPa
	BS2150SNC (150—200)	$\leq 0.9A$	$\leq 1.4A$	≥ 1200 ml/min	0.45—0.5 MPa
	BS2300SNC (300—400)	$\leq 1.4A$	$\leq 2.0A$	≥ 2200 ml/min	0.45—0.5 MPa

厂区一角 CORNER OF THE FACTORY



部分产品成果 RESEARCH ACHIEVEMENT



隔膜泵产品系列 Diaphragm Pump Series

主要品牌和产品用途 MAJOR BRANDS AND PRODUCT USAGE:



本公司生产的隔膜泵主要有“MUDEBI”、“星太郎”、“雨露”三个品牌，使用材料均为进口，具有抗老化、耐腐蚀、不易变形等特点。产品主要用于电动喷雾器喷雾，也适用于船舶水处理、液体的分配和灌装，饮水机、生活用净水设备及清洗机械等。

The main diaphragm pumps are "MUDEBI", "XINGTAILANG" and "Rain & Dew". They all using imported materials and characterized by anti-aging, corrosion resistance and never deformation. This series pump are used for electric sprayers, and also be applied to ship for water treatment, distribution of liquid filling, water dispensers, water cleaning equipment in daily life, other cleaning equipment ect.



星太郎品牌 XINGTAILANG BRAND

星太郎系列品牌产品是专为适应日本市场而设计，产品外观紧凑，具有压力控制稳定、出水压力高、流量大、耗电低等特点，特别适合锂电池喷雾器使用。

XingTaiLang series are specially designed to adapt to the Japanese market, they are more suitable for lithium battery sprayers, as they are characterized with high pressure, large flow, low noise, low current, no leakage and easy to control.



626N



628N

MUDEBI品牌 MUDEBI BRAND

MUDEBI系列品牌产品是专为出口欧美及东南亚国家而设计，产品外观洁净靓丽，配用大扭矩电机，具有运转平稳、高压、高流量等特点，特别适合大压力高流量喷雾产品。

MUDEBI series of products is designed for exported to Europe, America and Southeast Asia countries. Product appearance, clean and beautiful, equipped with big torque motor, with running smooth, high pressure, high flow characteristics, especially suitable for high pressure and flow sprayer.



728N



726N



738N



736N

技术参数 SPECIFICATION:

产品代号Model	626N	628N	726N/736N	728N/738N
最大压力Max Pressure (MPa/psi)	0.6/87		0.7/101.5	
流量Flow(L/min)	3.0		4.0	
工作电压Volt	12VDC			
最大电流Max Amp (A)	1.5		2.5	
压力控制方式Pressure Control	回流Reflux	自动断电Switch Off	回流Reflux	自动断电Switch Off
包装数量Package Quantity (Pcs)	40			

四冲程隔膜泵 FOUR STROKE DIAPHRAGM PUMP

专利产品PATENTED PRODUCT

专利号: ZL201620796903X



技术参数SPECIFICATION:

产品代号Model	828/838	826/836
最大工作压力Max Pressure (MPa/psi)	0.8 /116	0.8 /116
流量Flow(L/min)	5.0	5
工作电压Volt	12VDC	12VDC
最大电流Max Amp (A)	4.5	4.5
压力控制方式Pressure Control	自动断电Switch Off	回流Reflux
包装数量Package Quantity (Pcs)	24	24

双核动力泵 DUAL CORE POWER PUMP

专利产品PATENTED PRODUCT

专利号: ZL201520172756.4



技术参数SPECIFICATION:

产品代号Model	1038/1428/1438	1036/1426/1436
最大工作压力Max Pressure (MPa/psi)	0.72 /105	0.72 /105
流量Flow(L/min)	6.0	6
工作电压Volt	12VDC	12VDC
最大电流Max Amp (A)	5.0	5.0
压力控制方式Pressure Control	自动断电Switch Off	回流Reflux
包装数量Package Quantity (Pcs)	24	24

专利产品PATENT PRODUCT

专利号PATENT NUMBER
ZL201520172756.4



1426



1436



1038



1036

技术参数SPECIFICATION:

产品代号Model	1038/1426/1438	1036/1426/1436
最大工作压力Max Pressure (MPa/psi)	0.72 / 105	0.72 / 105
流量Flow (L/min)	6.0	6
工作电压Volt	12VDC	12VDC
最大电流Max Amp (A)	5.0	5.0
压力控制方式Pressure Control	自动断电Switch Off	回流Reflux
包装数量Package Quantity (Pcs)	24	24

果林泵 ORCHARD PUMP



GP126B



GP486B

技术参数SPECIFICATION:

产品代号Model	GP126A/GP126B	GP486A/GP486B
最大工作压力Max Pressure (MPa/psi)	1.0 / 145	1.5 / 220
流量Flow (L/min)	6.0	8.0
工作电压Volt	12VDC	48VDC
最大电流Max Amp (A)	10	4
压力控制方式Pressure Control	自动断电Switch Off	自动断电Switch Off
包装数量Package Quantity (Pcs)	4	4

智豆泵及茶吧机 Zhidou Pump and Tea Bar Machine



521M



BS2050scc



BS370

技术参数SPECIFICATION:

产品代号Model	521M	BS2050scc	BS370
最大工作压力Max Pressure (MPa/psi)	0.45	0.4	
流量Flow (L/min)	3.5	1.4	400-420ml
工作电压Volt	12VDC	24VDC	3VDC
最大电流Max Amp (A)	2		0.3-0.4
压力控制方式Pressure Control	回流Reflux	回流Reflux	无
包装数量Package Quantity (Pcs)	50	40	

雨露 (Rain & Dew) 品牌

内回式电动隔膜泵 INTERNAL REFLUX TYPE DIAPHRAGM PUMP

专利产品 PATENTED PRODUCT

专利号: ZL201220031850.4



技术参数 SPECIFICATION:

产品代号 Model	N511/N521/N531	721/731
最大工作压力 Max Pressure (MPa/psi)	0.6/87	
流量 Flow (L/min)	3.0	4.0
工作电压 Volt	12VDC	
最大电流 Max. Amp. (A)	2.0	
压力控制方式 Pressure Control	内回流 Internal Reflux	
包装数量 Package Quantity (Pcs)	40	

普通回流式电动隔膜泵 EXTERNAL REFLUX TYPE DIAPHRAGM PUMP



技术参数 SPECIFICATION:

产品代号 Model	516/526/536	716/726/736
最大工作压力 Max Pressure (MPa/psi)	0.55/80	
流量 Flow (L/min)	3.5	
工作电压 Volt	12VDC	
最大电流 Max. Amp. (A)	2.5	2.0
压力控制方式 Pressure Control	回流 Reflux	
包装数量 Package Quantity (Pcs)	40	

智能型电动隔膜泵 INTELLIGENT TYPE DIAPHRAGM PUMP



技术参数 SPECIFICATION:

产品代号 Model	518/528/538/718/728/738
最大工作压力 Max Pressure (MPa/psi)	0.60/87
流量 Flow (L/min)	3.5
工作电压 Volt	12VDC
最大电流 Max. Amp. (A)	2.0
压力控制方式 Pressure Control	自动断电 Switch Off
包装数量 Package Quantity (Pcs)	40

清洗增压隔膜泵 CLEANING PRESSURIZED DIAPHRAGM PUMP



BS1428

BS1438

技术参数SPECIFICATION:

产品代号Model	BS1428/BS1438
最大工作压力Max Pressure (MPa/psi)	0.70/100
流量Flow (L/min)	5.0
工作电压Volt	12VDC
最大电流Max Amp (A)	5.0
压力控制方式Pressure Control	自动断电Switch Off
包装数量Package Quantity (Pcs)	24

便携式洗车器专用水泵 PORTABLE WASHING PUMPS



50W 水泵

518W

538W

528W

技术参数SPECIFICATION:

产品代号Model	518W	528W	538W
接口型式Interface Type	外螺纹M18	斜口	螺纹M18/斜口
最大工作压力Max Pressure (MPa/psi)	0.7/100	0.7/100	0.7/100
流量Flow (L/min)	4.0	4.0	4.0
工作电压Volt	12VDC	12VDC	12VDC
最大电流Max Amp (A)	4.0	4.0	4.0
压力控制方式Pressure Control	自动断电Switch Off	自动断电Switch Off	自动断电Switch Off
包装数量Package Quantity (Pcs)	40	40	40

潜水泵 SUBMERSIBLE PUMP

潜水式洗车泵可以直接浸在水中工作，电源接头出厂时配汽车点烟器插头，也可以根据客户要求特殊定制。产品使用汽车电瓶或其它12V直流电源供电。

Submersible pump for car washing can work directly submerged in water, its power connector can fit with the car cigarette lighter plug, also can customize according to customers special requirements. The pump can work with the car battery or other 12V DC power supply.

专利号 PATENT NUMBER

ZJP-6:ZL201721723417.6

ZJP-5:ZL201410086291.0

ZJP-5B:ZL201620796920.3

ZJP-5A:ZL201620397070.X

专利产品 PATENTED PRODUCT



手把Handle
喷枪Spray gun
包装箱Packing box
毛刷Brush
交直流适配器
AC / DC adapter
胶管Rubber hose
说明书
Instruction manual
潜水泵
Submersible pump



技术参数 SPECIFICATION:

产品代号Model	ZJP-5/ZJP-5A/ZJP-5B	ZJP-6
接口型式Connection Type	快速接口 Fast connection	
最大压力Max Pressure (MPa/psi)	0.6/87	0.8/116
流量Flow (L/min)	4.0	5.5
工作电压Volt	12VDC	
最大电流Max Amp (A)	4.0	4.5
压力控制方式Pressure Control	自动断电Switch Off (ZJP-6/ZJP-5/ZJP-5B)	回流控制Reflux control (ZJP-5A)
包装数量Package Quantity (Pos)	单独水泵, 不含附件Only pump, No annex	24
包装数量Package Quantity (Pos)	工具箱包装 (全套) Toolbox package (Full set)	10

加水泵 SUCTION PUMP

专利产品 PATENTED PRODUCT

专利号: ZL201520172756.4

技术参数 SPECIFICATION:

产品代号Model	ZJP-10
最大吸程Max Suction Height (M)	3
流量Flow (L/min)	10
工作电压Volt	12VDC
最大电流Max Amp (A)	1.8
输水管长度Tube Length (M)	1.8



净水器产品系列

Water Purification Pump Series

一个最具：最具竞争力的净水器专用泵制造商。

两个解决：《科技创新》解决行业瓶颈；

《高性价比》解决整机市场普及。

三个尊重：尊重事实；尊重品质；尊重顾客。

四一原则：服务第一；质量第一；诚信第一；科技创新第一。

五项方针：负责为本；全员参与；持续改进；力求完美；勇于突破。

六大特点：符合RoHS、CE最新认证；过流部件FDA食品级要求；

所有承压部件纯金属制造；密封部件纯进口材质；

电气、密封、通量性能全程全检；恒压自吸一体式设计。

One of the most: the most competitive water purification machine dedicated pump manufacturer.

Two solution: "science and technology innovation" solve bottleneck industry.

"Cost-effective" solve the machine market popularity.

Three respect: respect facts, Respect the quality, Respect for customers.

The designation principle: service first, Quality first, Integrity first, The first science and technology innovation.

Five policy: is responsible for this, Full participation, Continuous improvement, Strive to perfect, Have the courage to break through.

Six characteristics: comply with RoHS, CE certification, latest Over-current components of the FDA food grade requirements.

All pressure parts pure metal manufacturing, Sealing parts pure import material.

The entire all electrical, seal, the performance of flux, Constant pressure self-priming one-piece design.



常规增压泵系列



产品特点 Product features

- 符合RoHS、CE最新认证
- 过流部件FDA食品级要求
- 所有承压部件纯金属制造
- 密封部件纯进口材质
- 电气、密封、通量性能全程全检
- 强劲、恒定的出水压力

- In accordance with RoHS&CE certification latest
- Overcurrent components of the FDA food grade requirements
- All pressure parts pure metal manufacturing
- Sealing parts pure imported materials
- Electrical, seal, the performance of flux to the full inspection
- Strong and constant water pressure

产品参数 Product parameters

型号 Model	BS2050S	BS20750	BS2100G
电压 Voltage	24VDC	24VDC	24VDC
进出口螺纹 Connection	3/8"PT	3/8"PT	3/8"PT
进水压力 Inlet pressure	0.2MPa	0.2MPa	0.2MPa
工作压力 Operating pressure	0.5MPa	0.5MPa	0.5MPa
工作电流 Current	≤0.1A	≤0.1A	≤1.2A
工作流量 Work flow	>600ml/min	1800ml/min	2100ml/min
开放流量 Open flow	1600ml/min	1800ml/min	2000ml/min
最大压力 Max pressure	0.8-1.0MPa	0.8-1.0MPa	0.8-1.0MPa
最大电流 Max current	≤1.0A	≤1.2A	≤1.4A

鲁博士

400加仑家用机商用机专用泵



- 符合RoHS、CE最新认证
- 过流部件FDA食品级要求
- 所有承压部件纯金属制造
- 密封部件纯进口材质
- 电气、密封、通量性能全程全检
- 强劲、恒定的出水压力

产品图片	规格型号	工作电流	最大电流	工作流量	堵转压力
	BS2400N	$\leq 2.2A$	$\leq 3.5A$	≥ 5000 ml/min	0.8–1.0 MPa
	BS2400N	$\leq 2.2A$	$\leq 3.5A$	≥ 5000 ml/min	0.8–1.0 MPa